

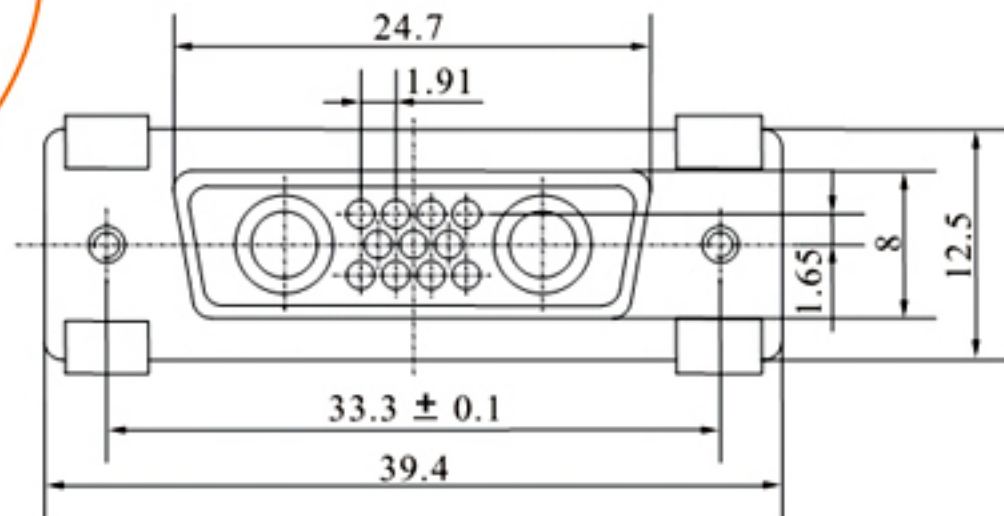




1.CDb压接式连接器
CDb-13T

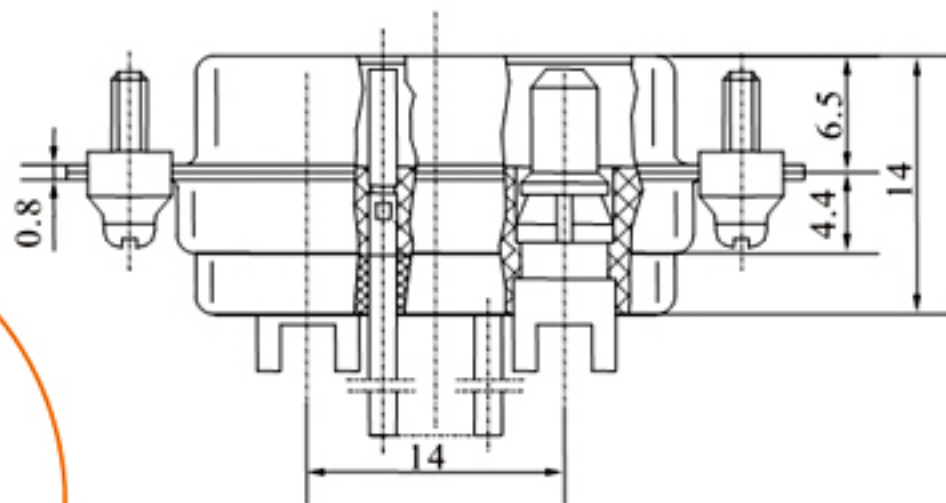

CDb-13Z


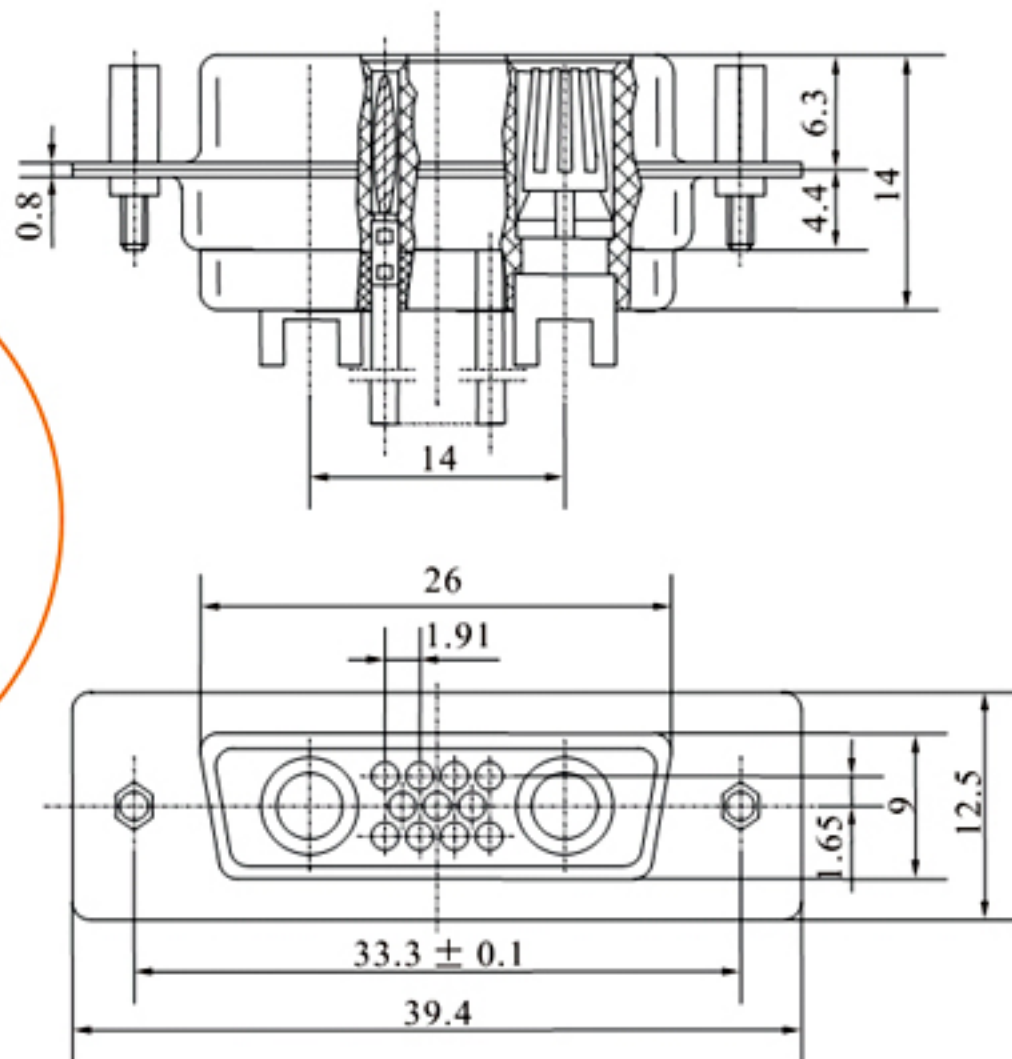


CDb-19T等

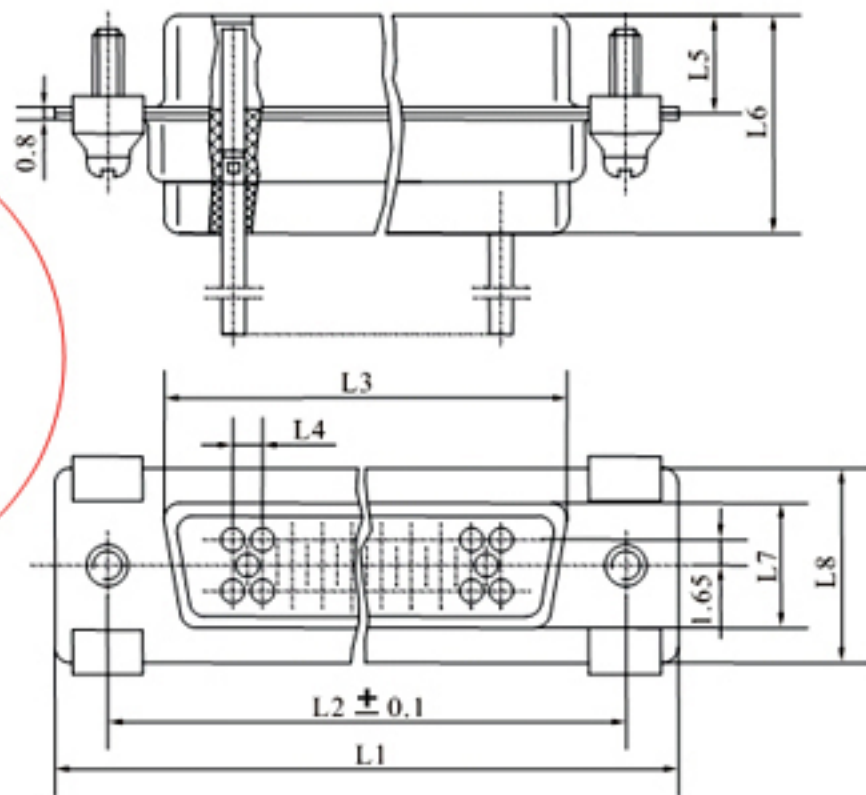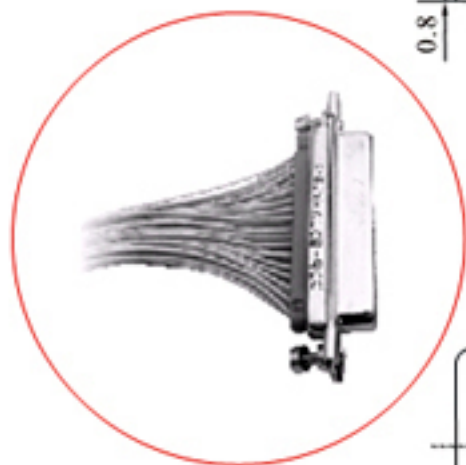


产品型号	L1	L2	L3	L4	L5	L6	L7	L8
CDb-19T	31	25	16.5	1.91	6.2	13.5	8	12.55
CDb-31T	39.4	33.3	24.7	1.91	6.3	14	8	12.5
CDb-52TY	53.03	47.04	38.38	1.91	6.57	13.5	7.9	12.55
CDb-79TY	69.31	63.5	54.84	1.91	6.57	13.5	7.9	12.55

CDb-19Z等

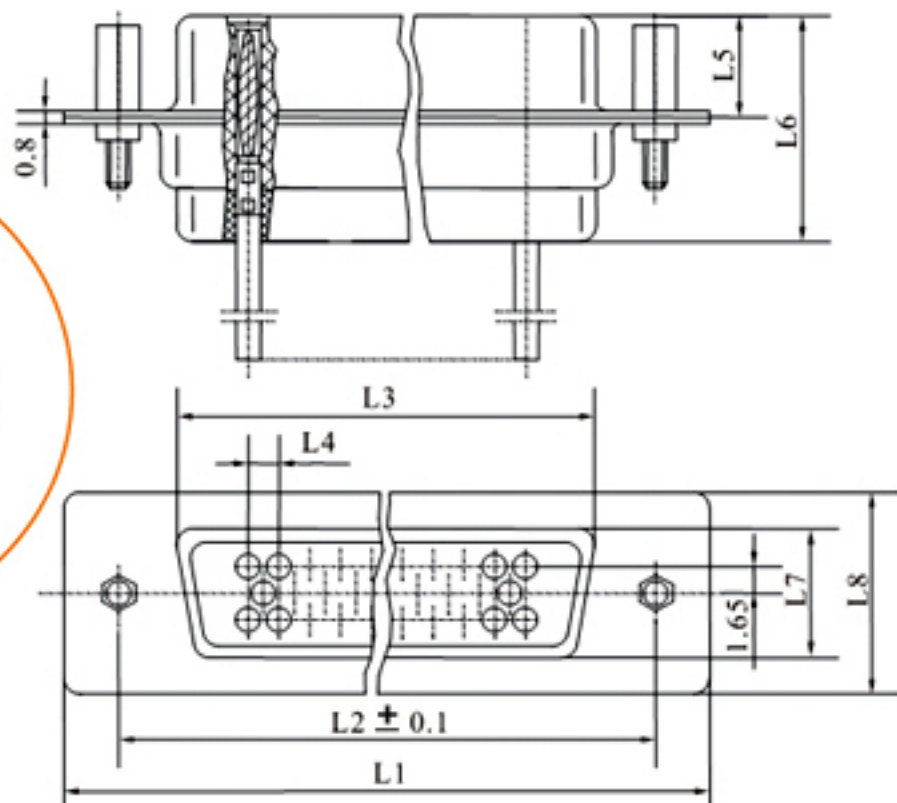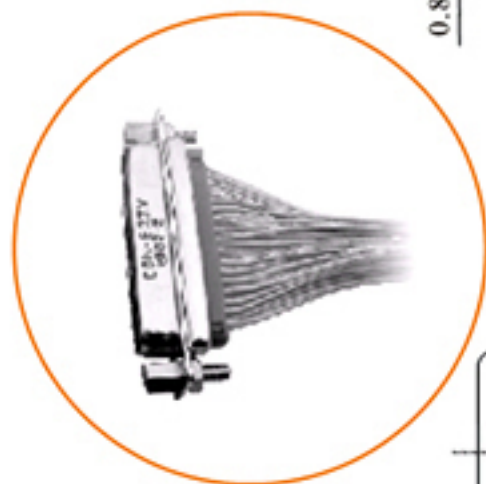


产品型号	L1	L2	L3	L4	L5	L6	L7	L8
CDb-19Z	31	25	17.5	1.91	6.4	13.5	9	12.5
CDb-31Z	39.4	33.3	24.7	1.91	6.5	14	9	12.5
CDb-52ZY	53.03	47.04	40.56	1.91	6.47	13.5	9.96	12.55
CDb-79ZY	69.31	63.5	57.05	1.910	6.47	13.5	10	12.55


CDb-100T

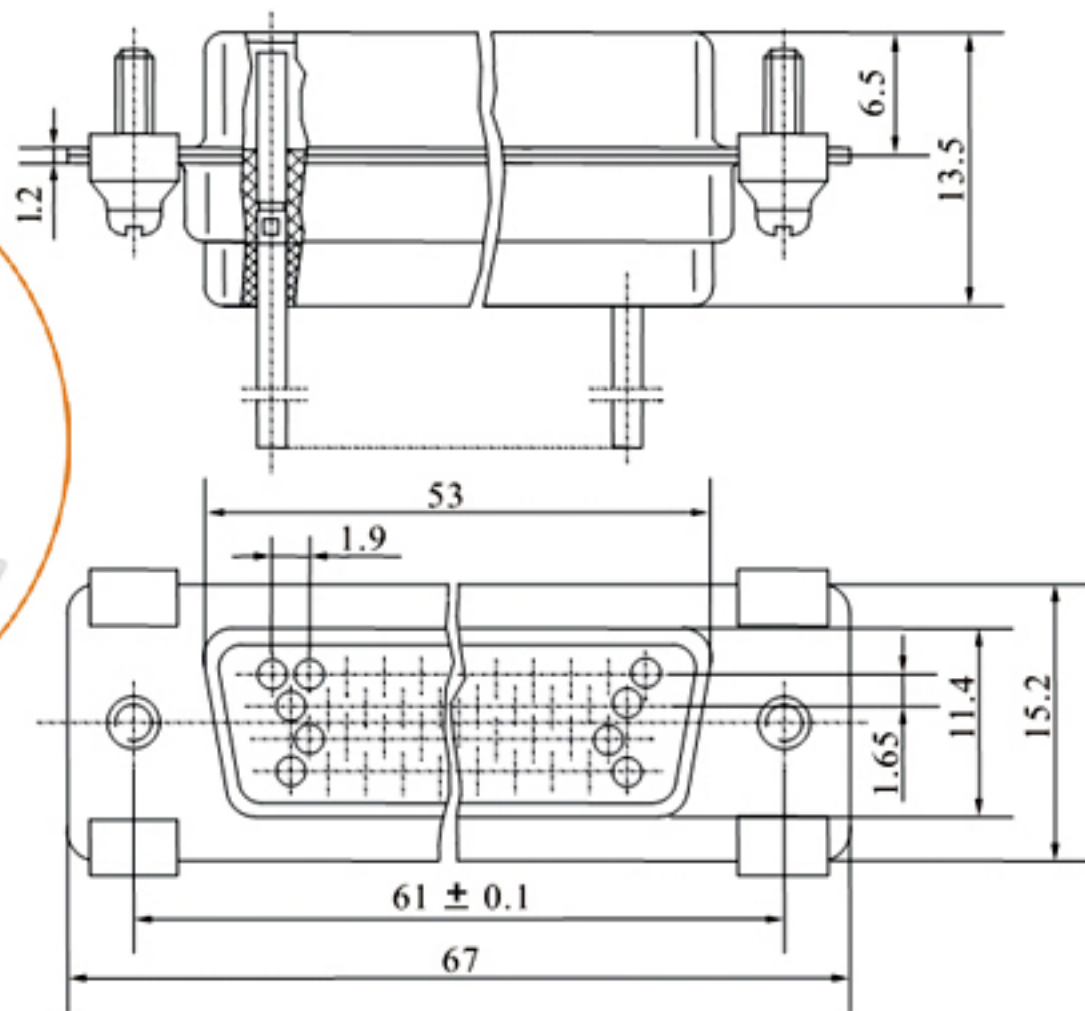


CDb-100Z

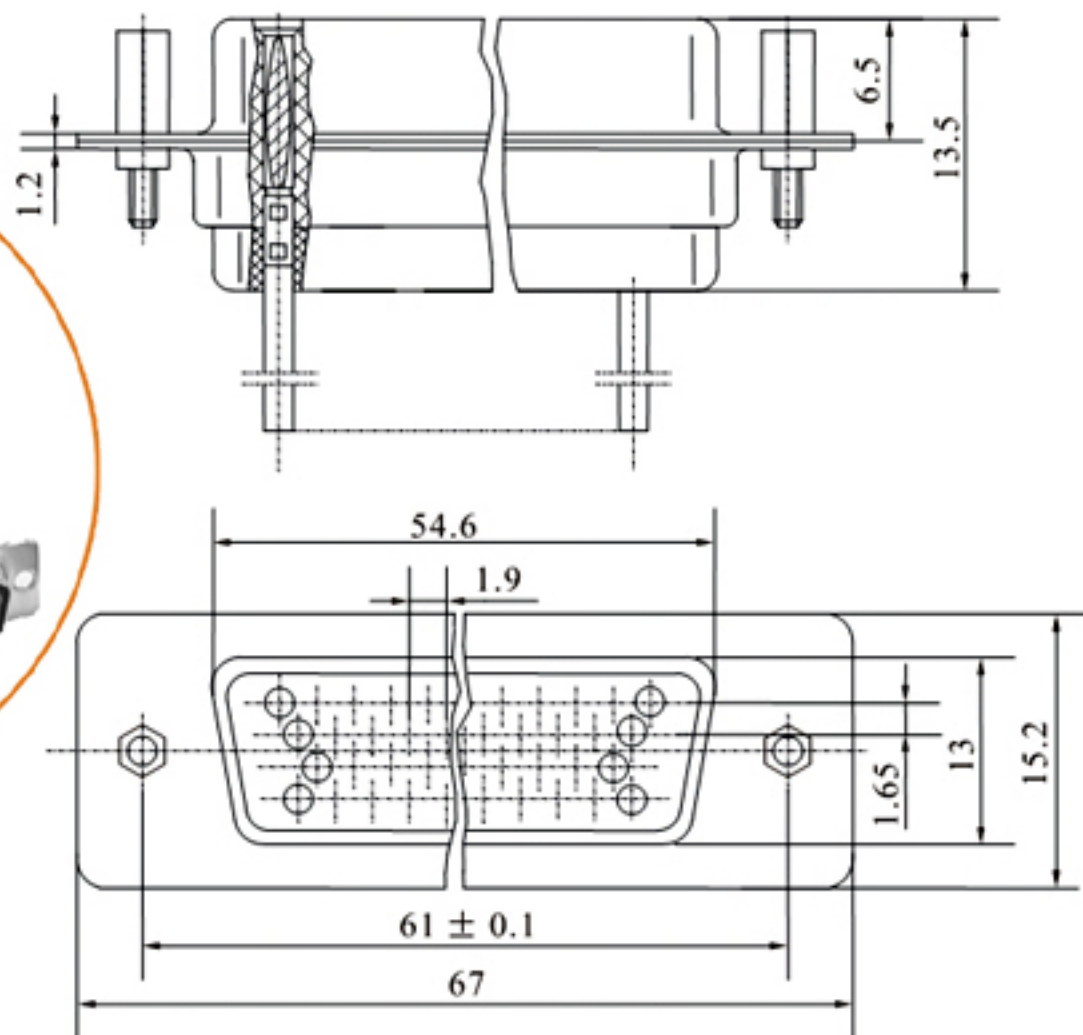


CDb-33T

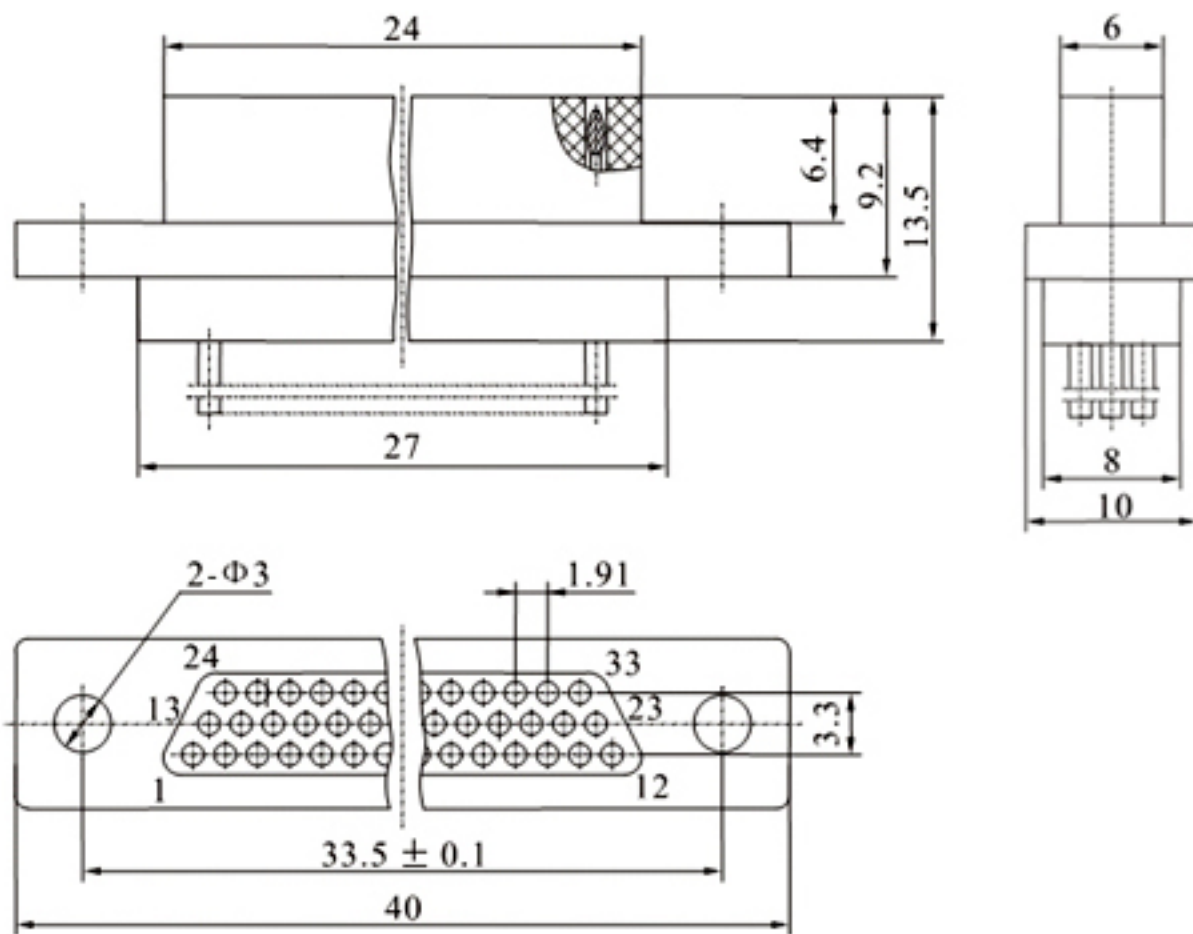


Cdb-33T

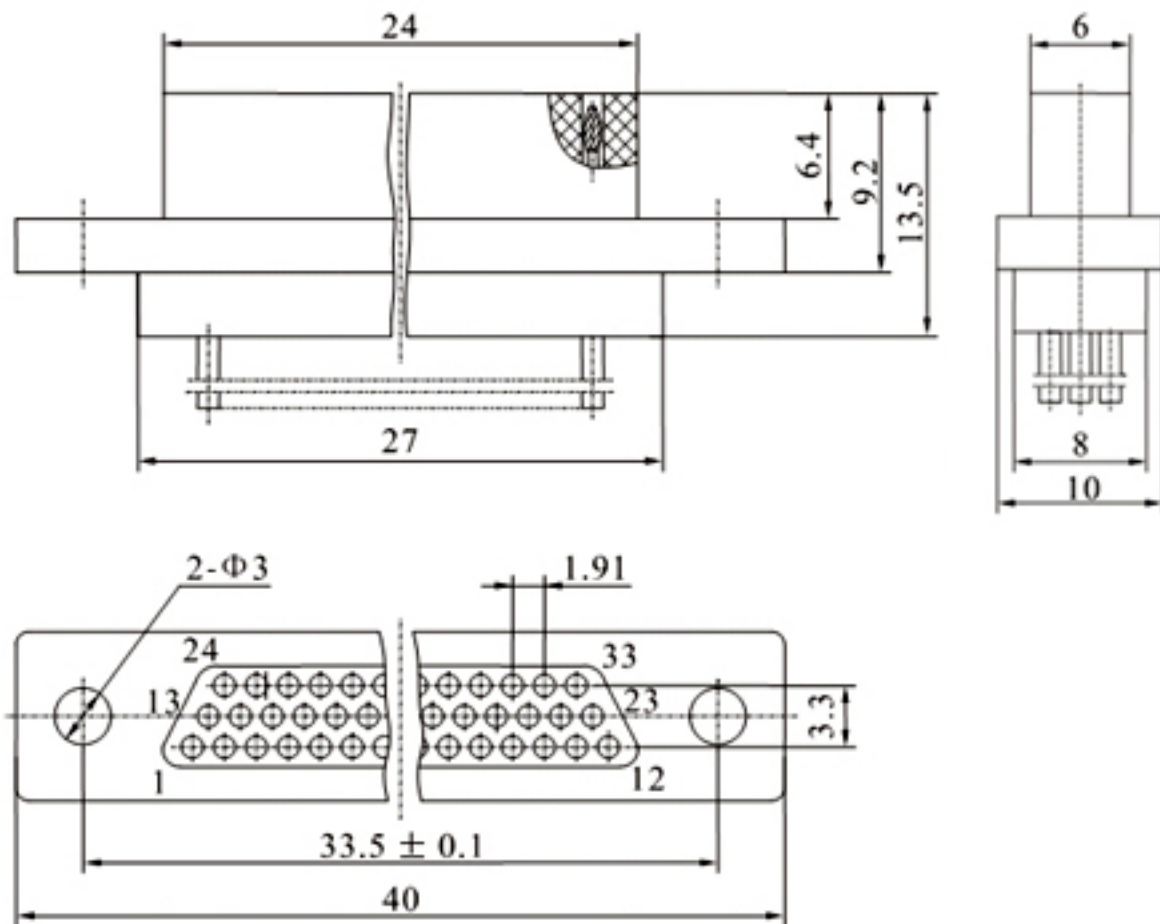


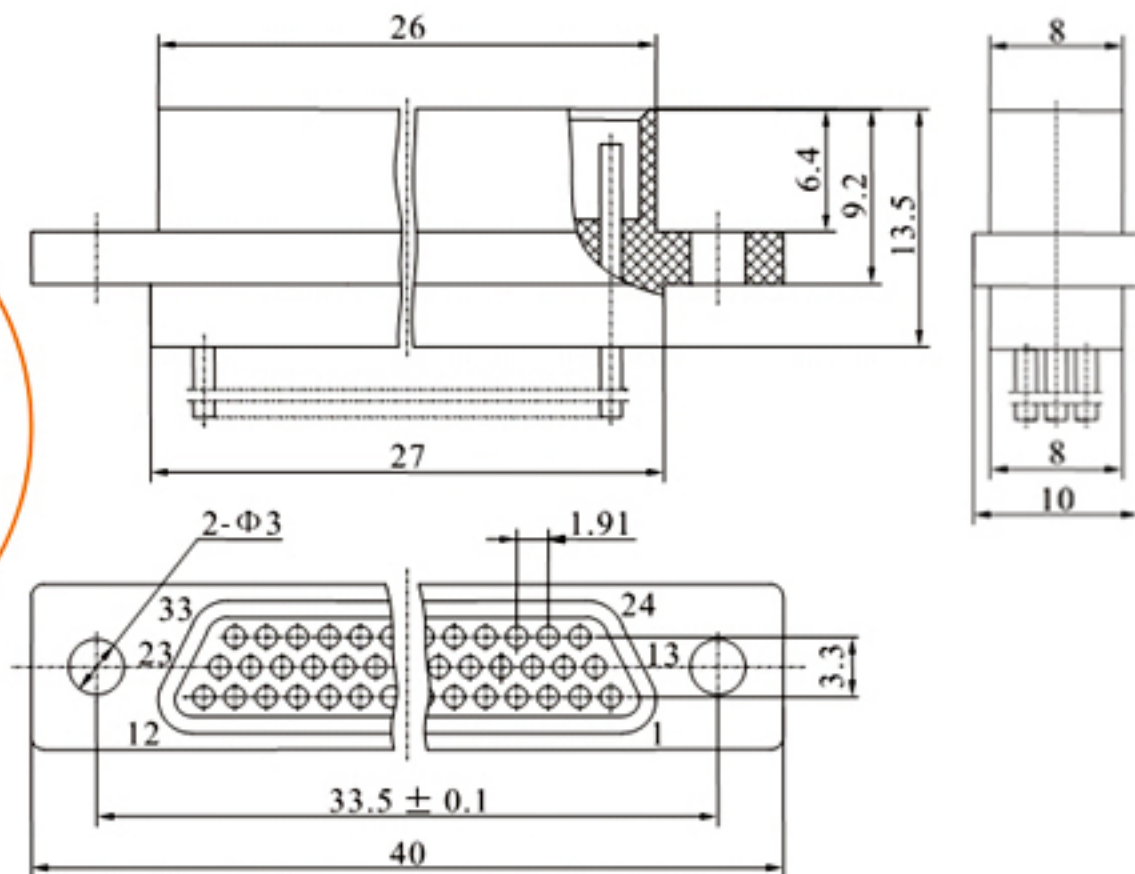

2.自动锁紧型连接器

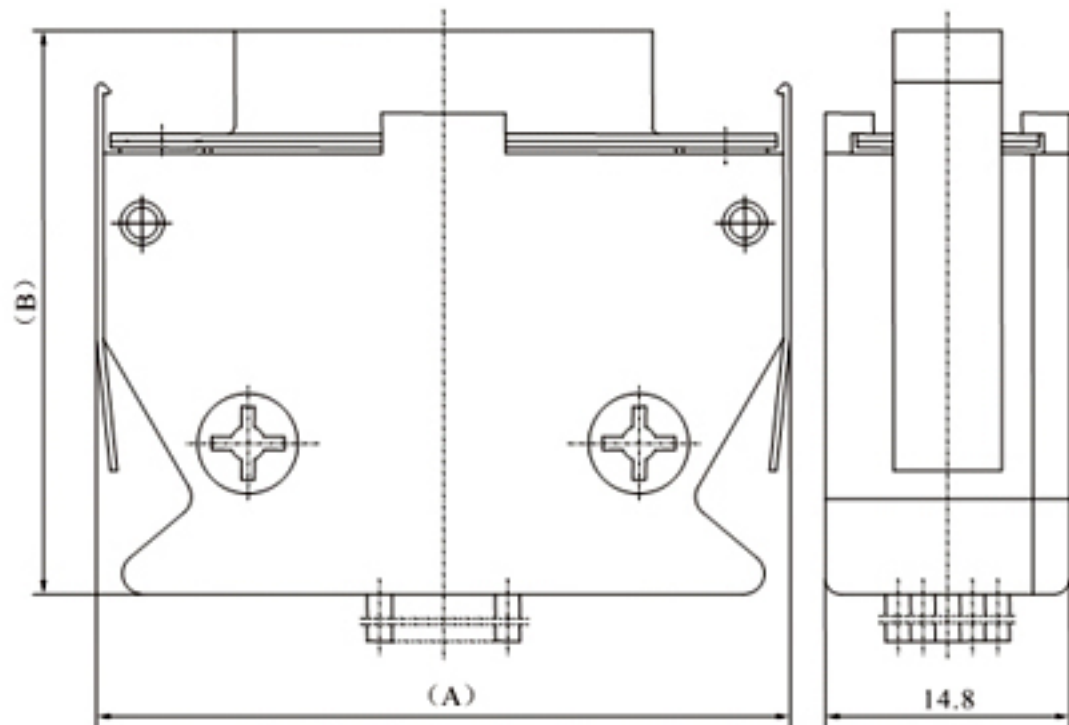


产品型号	A	B
CDb-13TKYS、TKS、TJYS、TJS	42.6	35.1
CDb-19TKYS、TKS、TJYS、TJS	34.2	34.1
CDb-31TKYS、TKS、TJYS、TJS	42.6	35.1

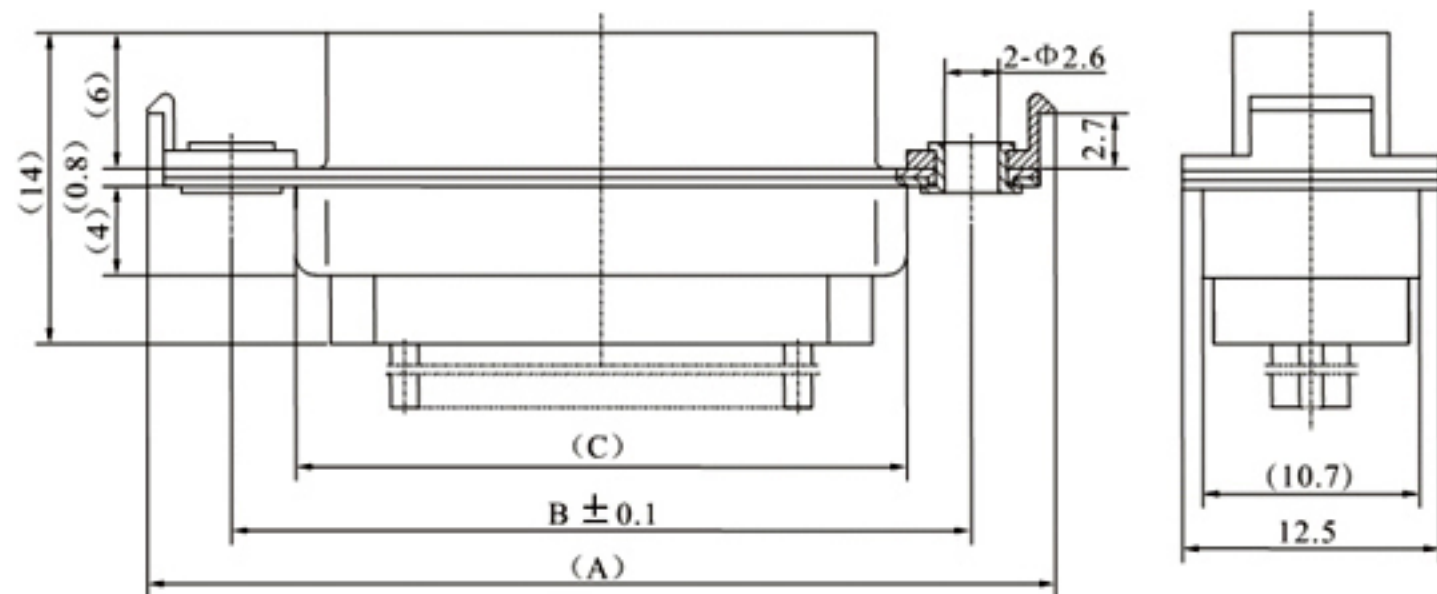


产品型号	A	B	C
CDb-13ZKYS、ZKS、ZJYS、ZJS	41	33.3	27.5
CDb-19ZKYS、ZKS、ZJYS、ZJS	32.6	25	19.2
CDb 31ZKYS、ZKS、ZJYS、ZJS	41	33.3	27.5

3. 插头带护线壳螺钉锁紧型连接器

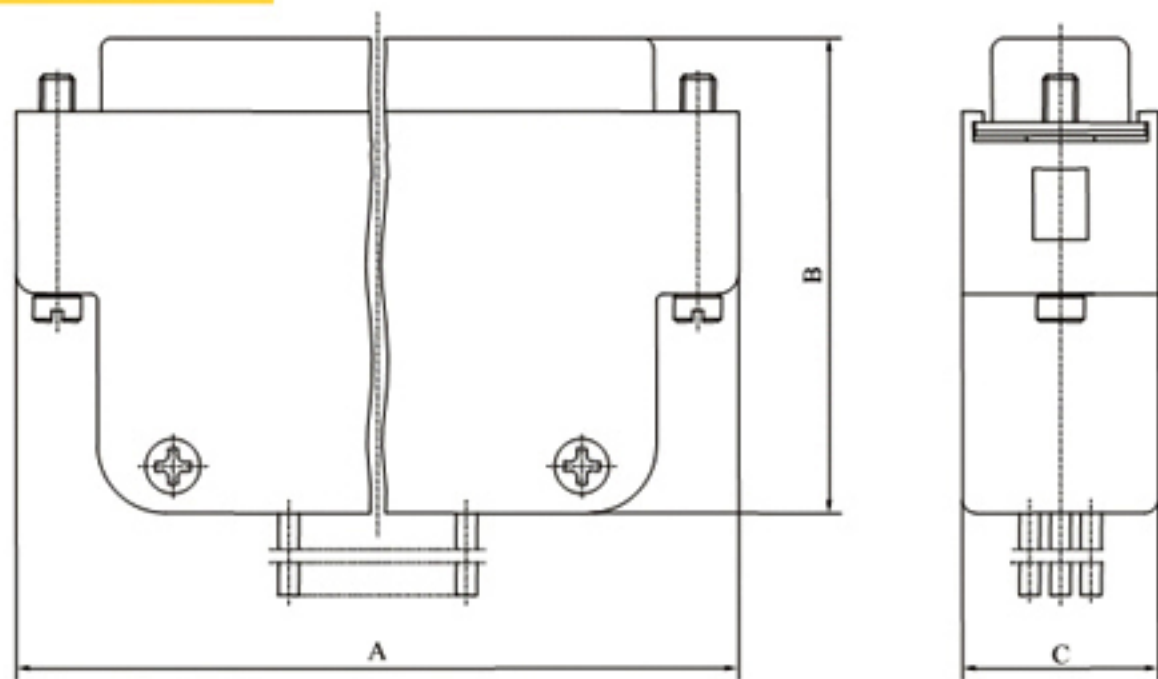



产品型号	A	B	C
CDb-52TKYS2, TKS2, TJYS2, TJS2	53.03	34.67	14.4
CDb-79TKYS2, TKS2, TJYS2, TJS2	69.31	34.67	14.4

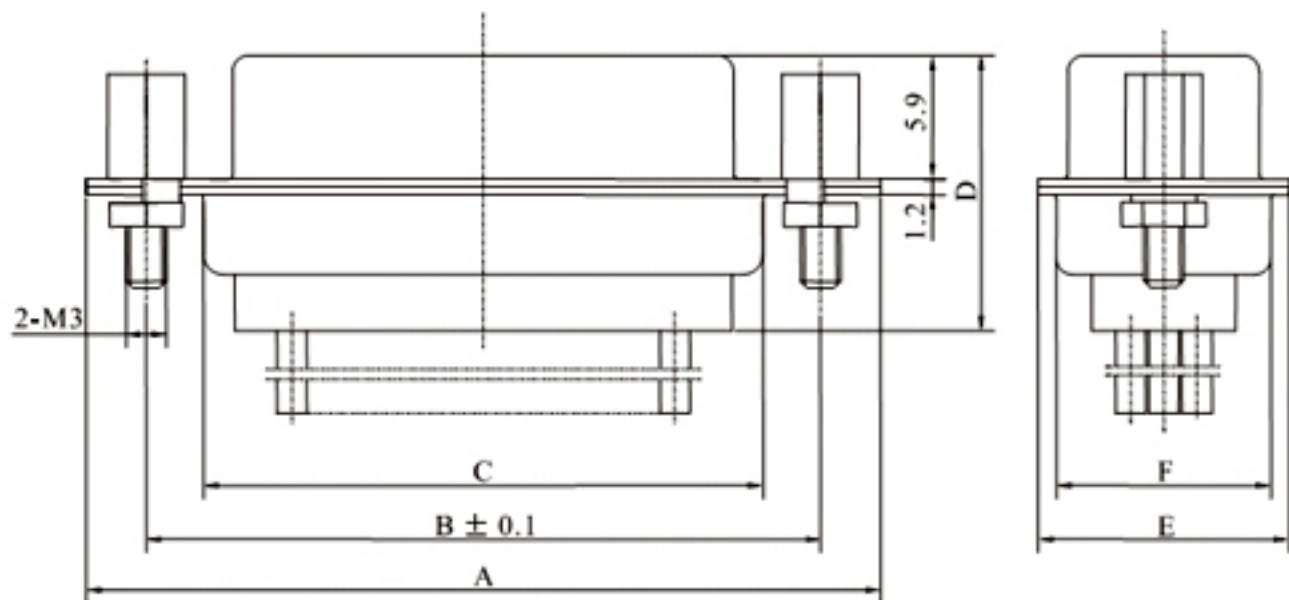

产品型号	A	B	C	D	E	F
CDb-52ZKY、ZK、ZJY、ZJ	53.03	47.04	41.27	13.5	12.55	10.72
CDb-79ZKY、ZK、ZJY、ZJ	69.31	63.5	57.71	13.5	12.55	10.72

4.CDb系列1.91mm间距插座连接器孔位排列图

4. CDb系列1.91mm间距插座连接器孔位排列图（从对插面看）



技术参数

使用环境条件		主要技术特性	
环境温度	-55~+125℃	工作电流	5A max
相对湿度	40℃, 98%	接触电阻	≤10mΩ
大气压力	4~4kPa	绝缘电阻	≥5000MΩ
振 动	10~2000Hz, 196m/s ²	耐 压	800V
冲 击	490m/s ²	寿 命	500 次