




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS

【SMA射频同轴连接器具有体积小、频带宽、机械电气性能优越、可靠性高等优点，是应用最广泛的性能优越、可靠性高等优点，是应用最广泛的射频连接器。广泛应用于微波通讯，航天航海，武器系统及微波测量设备等领域。】

Series SMA connectors are most commonly used. It has the advantages of miniature size, wide frequency range, excellent electrical performance and high reliability. The products have been widely used in the field of micro-wave communication, spaceflight and navigation, weapon system and micro-wave measuring equipment.




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS

SMA射频同轴连接器具有体积小、
频带宽、机械电气性能优越、可靠性
高等优点，是应用最广泛的性能优越、
可靠性高等优点，是应用最广泛的射
频连接器。广泛应用于微波通讯，航
天航海，武器系统及微波测量设备等
领域。


主要技术特性			KEY PERFORMANCE		
温度范围 Temperature range		-65~+165℃	绝缘电阻 Insulation resistance		≥5000MΩ
特性阻抗 Characteristic Impedance		50 Ω	介质耐压 Dielectric Withstanding voltage		1000V
频率范围 Frequency range	配软电缆 With flexible cable	0~12.4GHz	接触电阻 Contact resistance	中心导体 Center conductor	≤0.003 Ω
	配半刚、半柔性电缆 With semi-rigid/flexible cable	0~18GHz		外导体 Outer conductor	≤0.002 Ω
电压驻波比 VSWR	配软电缆 With flexible cable	≤1.15+0.02F	寿命 Durability		500次
	配半刚、半柔性电缆 With semi-rigid/flexible cable	≤1.10+0.02F			

头部配合尺寸

INTERFACE MATING DIMENSIONS

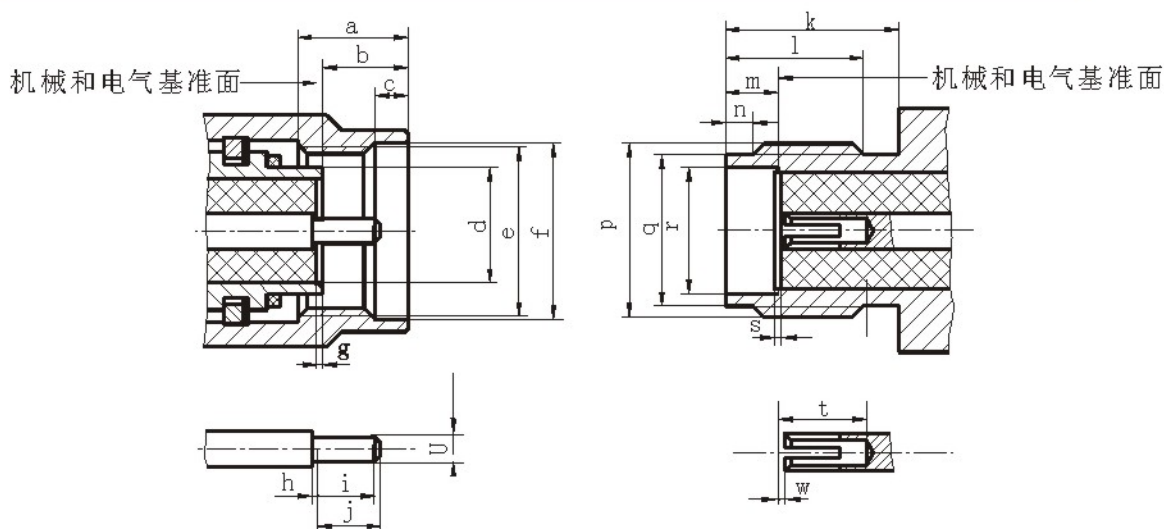


Symbol	MIN (mm)	MAX (mm)	Symbol	MIN (mm)	MAX (mm)	Symbol	MIN (mm)	MAX (mm)
a	3.30	—	h	0	0.25	p	1/4-36UNS-2A	
b	—	3.43	i	1.27	—	q	Φ 5.28	Φ 5.49
c	0.38	1.14	j	—	2.54	r	Φ 4.597	Φ 4.670
d	Φ 4.340	Φ 4.592	k	5.54	—	s	0	0.1
e	1/4-36UNS-2B		l	4.32	—	t	2.92	—
f	Φ 6.35	Φ 6.73	m	1.88	1.98	U	Φ 0.90	Φ 0.94
g	0.05	0.1	n	0.38	1.14	w	0	0.76




系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS




SMA-KK

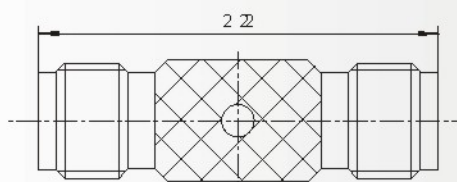



SMA-KJK





SMA-KKK1




SMA-KKK



SMA-KFJ







系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS






SMA-KFK 等

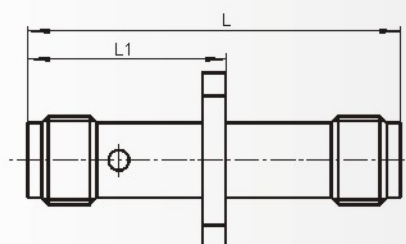



Type	L	L1
SMA-KFK	27	14.35
SMA-KFK-1	19.5	10.6
SMA-KFK-2	16	8.9
SMA-KFK-3	21	14.3





SMA-KYK

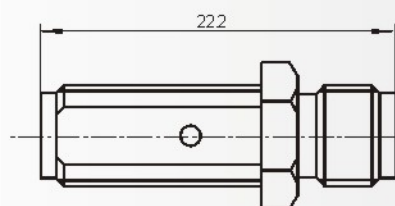



SMA(M)-KFK (气密封)

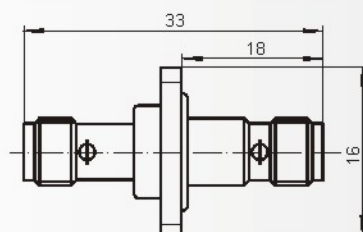


SMA(M)-KYK (气密封)



SMA(M)-KYK1 (气密封)







系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS




SMA(M)-KYK2 (气密封)




安装开孔尺寸
Mounting hole




BNC/SMA-JJ

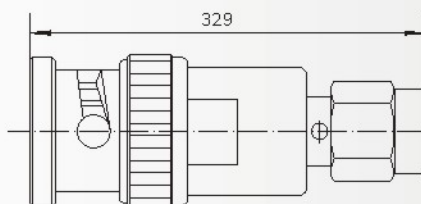


BNC/SMA-JK

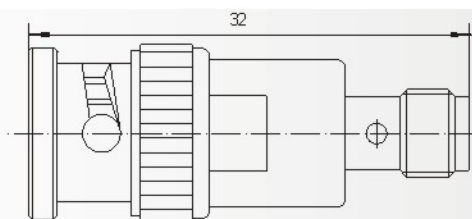


BNC/SMA-KJ

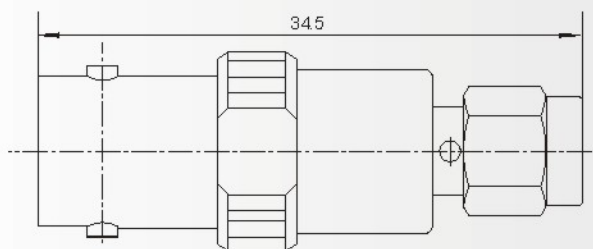


BNC/SMA-KK



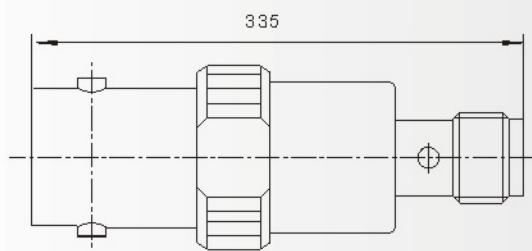





系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS

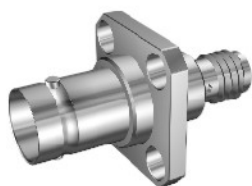


BNC/SMA-KFK

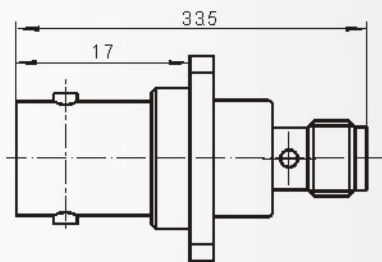


TNC/SMA-JJ

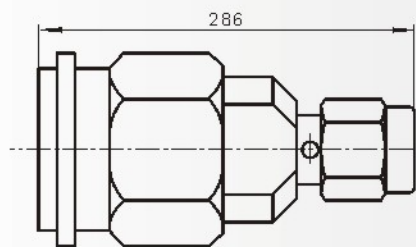


TNC/SMA-JK

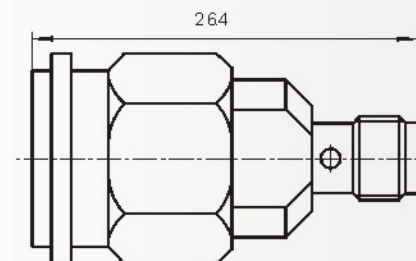


TNC/SMA-KJ

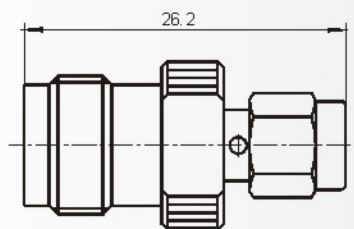

TNC/SMA-KK

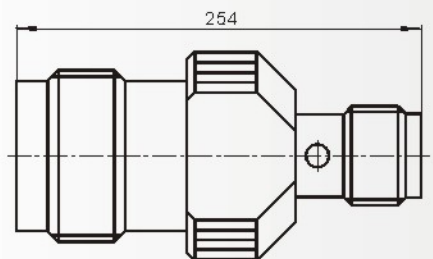





系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS




TNC/SMA-KFK




安装开孔尺寸
Mounting hole




TNC/SMA-KYK




安装开孔尺寸
Mounting hole




N/SMA-JJ

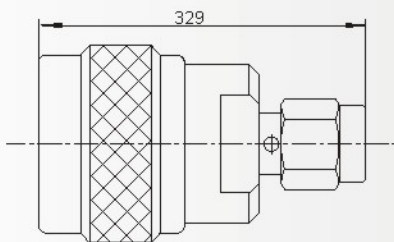

N/SMA-JK



N/SMA-KJ









系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS





N/SMA-KK

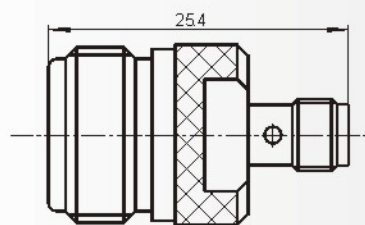



N/SMA-KFJ




N/SMA-KFK




N/SMA-KYK







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-JFD等




安装开孔尺寸
Mounting hole




Type	L	L1
SMA-JFD	25.4	8.6
SMA-JFD23	18.7	2.0



SMA-JFD1等




安装开孔尺寸
Mounting hole




Type	L	L1
SMA-JFD1	17.8	2.4
SMA-JFD2	18.6	3.2
SMA-JFD3	20.2	4.8
SMA-JFD4	19.4	4.0



SMA-JFD5等




安装开孔尺寸
Mounting hole




Type	h
SMA-JFD5	0.5
SMA-JFD9	0.2




SMA-JFD6




安装开孔尺寸
Mounting hole



SMA-JFD7等




安装开孔尺寸
Mounting hole





Type	L	L1
SMA-JFD7	18.6	3.2
SMA-JFD8	19.4	4.0
SMA-JFD21	17.9	2.4



系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-JFD11等




Type	L	L1	L2	d1	d2
SMA-JFD11	18.9	2.4	4.0	φ1.3	φ4.1
SMA-JFD12	23.3	8.4	2.0	φ1.3	φ4.1
SMA-JFD13	25.3	8.4	4.0	φ1.3	φ4.1
SMA-JFD14	17.4	4.0	0.6	φ0.4	φ4.1





SMA-JFD15等





Type	h
SMA-JFD15	0.2
SMA-JFD16	0.4





SMA-JFD15a




SMA-JFD17




SMA-JFD18等




Type	L	L1	L2	d
SMA-JFD18	19.1	3.2	3.0	φ1.3
SMA-JFD19	19.4	4.0	2.5	φ1.3





系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-JFD20





安装开孔尺寸
Mounting hole




SMA-JFD22




安装开孔尺寸
Mounting hole

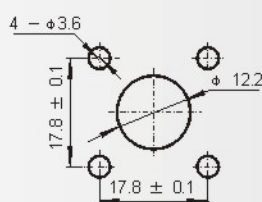


SMA-JFD10等




安装开孔尺寸
Mounting hole





Type	L	L1	d	D
SMA-JFD10	16.9	4.0	φ 1.3	φ 2.9
SMA-JFD24	14.5	1.6	φ 0.9	φ 2.1
SMA-JFD25	14.1	1.2	φ 0.8	φ 1.8
SMA-JFD25A	13.8	0.9	φ 0.5	φ 1.2




SMA-JFD28




安装开孔尺寸
Mounting hole

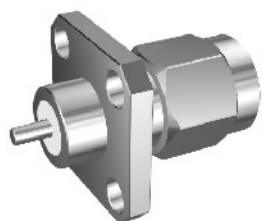


SMA-JFD27等



安装开孔尺寸
Mounting hole




Type	L	L1	L2	d
SMA-JFD27	18.0	2.4	2.5	φ 1.0
SMA-JFD30	17.4	3.0	1.5	φ 0.7




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-JFD33




安装开孔尺寸
Mounting hole



SMA-JFD34等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2
SMA-JFD34	25.0	8.4	4.0	φ1.3	φ4.1
SMA-JFD35	25.0	5.0	4.5	φ1.3	φ4.1
SMA-JFD37	22.4	7.5	2.0	φ1.3	φ4.1




SMA-JFD38




安装开孔尺寸
Mounting hole




SMA-JWFD




安装开孔尺寸
Mounting hole




SMA-KFD




安装开孔尺寸
Mounting hole








系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KFD1等





Type	L	L1	L2	h
SMA-KFD1	17.5	8.0	1.4	0.6
SMA-KFD2	12.0	2.4	1.6	0.6
SMA-KFD18	12.1	2.5	1.6	0.2

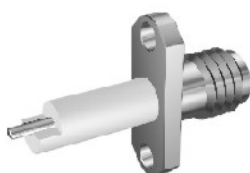

SMA-KFD4




SMA-KFD3等




Type	L	L1	L2	d1	d2	D
SMA-KFD3	27.4	15.0	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD5B	14.7	3.2	2.0	φ1.3	φ4.1	φ4.2




SMA-KFD5等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD5	15.5	4.0	2.0	φ1.3	φ4.1	φ4.2
SMA-KFD6	20.5	9.0	2.0	φ1.3	φ4.1	φ4.2



SMA-KFD7




安装开孔尺寸
Mounting hole








系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KFD8




Type	d
SMA-KFD8	Φ1.0





SMA-KFD9等



Type	L	L1
SMA-KFD9	14.5	2.4
SMA-KFD10	15.3	3.2
SMA-KFD11	16.9	4.8
SMA-KFD12	16.1	4.0





SMA-KFD13等



Type	L	L1	d	D
SMA-KFD13	16.0	4.0	Φ4.1	Φ4.2
SMA-KFD14	15.3	3.2	Φ4.1	Φ4.2




SMA-KFD15等




Type	h	L	L1
SMA-KFD15	0.4	2.0	2.0
SMA-KFD28	0.2	3.0	2.5




SMA-KFD17




安装开孔尺寸
Mounting hole




Type	L	L1	L2
SMA-KFD17	14.7	5.2	4.1




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD19A等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD19A	15.6	2.0	12.2±0.1	Φ1.3	Φ6.0	Φ6.1
SMA-KFD19AG	15.6	2.0	12.2±0.1	Φ1.3	Φ6.0	Φ6.1



SMA-KFD19等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d
SMA-KFD19	15.5	4.0	2.0	Φ1.3
SMA-KFD29	15.7	3.2	3.0	Φ1.3



SMA-KFD20等




安装开孔尺寸
Mounting hole




Type	L	L1
SMA-KFD20	13.5	4.0
SMA-KFD51	12.0	2.5



SMA-KFD21等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD21	15.5	2.0	4.0	Φ1.3	Φ4.1	Φ4.2
SMA-KFD46	16.5	4.0	3.0	Φ1.3	Φ4.1	Φ4.2



SMA-KFD22等



安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2
SMA-KFD22	27.4	15.0	3.0	Φ1.3	Φ4.1
SMA-KFD23	14.1	4.0	0.6	Φ0.4	Φ4.1
SMA-KFD43	21.5	4.0	8.0	Φ1.3	Φ4.1




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KFD24




安装开孔尺寸
Mounting hole



SMA-KFD26等




安装开孔尺寸
Mounting hole




Type	h
SMA-KFD26	0.2
SMA-KFD27	0.4



SMA-KFD30等




安装开孔尺寸
Mounting hole




Type	L1	L2
SMA-KFD30	4.0	3.0
SMA-KFD34	1.0	1.0




SMA-KFD31




安装开孔尺寸
Mounting hole




SMA-KFD32等




安装开孔尺寸
Mounting hole




Type	L	L1	h	D
SMA-KFD32	16.1	2.5	0.2	φ 4.2
SMA-KFD33	10.9	1.4	0.2	φ 4.2




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS

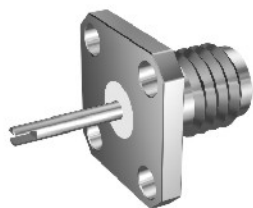


SMA-KFD35等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	h
SMA-KFD35	10.6	1.0	1.0	0.4
SMA-KFD36	10.6	1.0	1.0	0.2

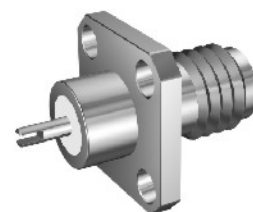


SMA-KFD37




安装开孔尺寸
Mounting hole




SMA-KFD38




安装开孔尺寸
Mounting hole




SMA-KFD39




安装开孔尺寸
Mounting hole




SMA-KFD40



安装开孔尺寸
Mounting hole





Type	L	L1	L2
SMA-KFD40	16.5	7.0	3.0




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KFD41

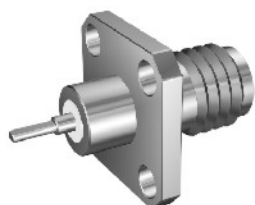


SMA-KFD42




安装开孔尺寸
Mounting hole



SMA-KFD44




安装开孔尺寸
Mounting hole




Type	d
SMA-KFD44	φ0.6



SMA-KFD45等




安装开孔尺寸
Mounting hole




Type	L	L1	d	D
SMA-KFD45	14.4	2.4	φ4.1	φ4.2
SMA-KFD58	15.2	3.2	φ2.1	φ2.2



SMA-KFD47等



安装开孔尺寸
Mounting hole




Type	L	L1	d
SMA-KFD47	11.1	1.8	φ0.8
SMA-KFD48	10.7	1.2	φ0.8
SMA-KFD48A	10.4	0.9	φ0.8




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD51




安装开孔尺寸
Mounting hole




Type	L	L1
SMA-KFD51	12.0	2.5



SMA-KFD53




安装开孔尺寸
Mounting hole




Type	t	D
SMA-KFD53	2.6	Φ2.9




SMA-KFD54




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d
SMA-KFD54	14.5	2.4	2.5	Φ1.0




SMA-KFD55




安装开孔尺寸
Mounting hole



SMA-KFD56



安装开孔尺寸
Mounting hole







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD57等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD57	17.4	5.0	3.0	Φ0.8	Φ4.1	Φ4.2
SMA-KFD64	27.4	15.0	3.0	Φ1.3	Φ4.1	Φ4.2
SMA-KFD77	15.6	2.0	4.0	Φ1.3	Φ4.1	Φ4.2



SMA-KFD65




安装开孔尺寸
Mounting hole




Type	L	L1
SMA-KFD65	12.5	3.0



SMA-KFD68B等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD68B	15.2	3.2	2.5	Φ0.7	Φ2.1	Φ2.2
SMA-KFD83	14.5	2.4	2.5	Φ1.3	Φ4.1	Φ4.2
SMA-KFD85	27.4	13	5.0	Φ1.3	Φ4.1	Φ4.2



SMA-KFD69等




安装开孔尺寸
Mounting hole




Type	t	L1	L2
SMA-KFD69	0.62	2.5	5.5
SMA-KFD73	0.55	4.0	5.6




SMA-KFD71等



安装开孔尺寸
Mounting hole




Type	h	d	D
SMA-KFD71	12.2 ± 0.1	Φ0.6	*
SMA-KFD72	12.2 ± 0.1	Φ0.4	*
SMA-KFD72G	12.2 ± 0.1	Φ0.4	*
SMA-KFD75	10.2 ± 0.1	Φ0.6	*




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD78等




安装开孔尺寸
Mounting hole




Type	L	L1	d
SMA-KFD78	11.0	1.5	φ0.7
SMA-KFD88	14.1	1.5	φ0.5



SMA-KFD75AG等




安装开孔尺寸
Mounting hole




Type	L	d	D
SMA-KFD75AG	9.5	φ0.6	※
SMA-KFD191	9.5	φ0.8	※



SMA-KFD76等




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d
SMA-KFD76	14.0	3.0	1.5	φ0.7
SMA-KFD96	15.7	4.0	1.5	φ0.8
SMA-KFD76AG	14.0	3.0	1.5	φ0.7
SMA-KFD-2.5	18.0	2.5	2.5	φ1.3




SMA-KFD80




安装开孔尺寸
Mounting hole




Type	L	L1	L2
SMA-KFD80	14.7	5.2	2.8

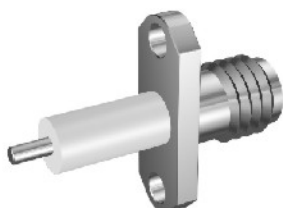

SMA-KFD84等



安装开孔尺寸
Mounting hole





Type	L	L1	L2	d1	d2	D
SMA-KFD84	15.6	3.0	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD84G	15.5	3.0	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD102	17.6	5.0	3.0	φ1.3	φ4.1	φ4.2





系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KFD86





SMA-KFD87



Type	L	L1
SMA-KFD87	15.0	3.0





SMA-KFD90



Type	L	L1	L2
SMA-KFD90	15.0	3.0	2.5
SMA-KFD90G	15.0	3.0	2.5





SMA-KFD92




Type	h	d	D
SMA-KFD92	12.2	φ 0.9	※
SMA-KFD113	10.2	φ 0.4	※




SMA-KFD93




Type	t	D
SMA-KFD93	2.8	*




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-JBC2C等




电缆剥线尺寸
Cable stripping dimension




Type	d	Cable type
SMA-JBC2C	Φ2.2	SFT-50-2-1
SMA-JBC3C	Φ3.6	SFT-50-3-1



SMA-JB2G等




电缆剥线尺寸
Cable stripping dimension




Type	d	Cable type	备注
SMA-JB2G	Φ2.2	SFT-50-2-1	不锈钢外壳、螺套
SMA-JB3G	Φ3.6	SFT-50-3-1	外壳镀金、螺套钝化



SMA-JB2等




电缆剥线尺寸
Cable stripping dimension




Type	d	Cable type
SMA-JB2	Φ2.2	SFT-50-2-1
SMA-JB3	Φ3.6	SFT-50-3-1



SMA-JB3A




电缆剥线尺寸
Cable stripping dimension



Type	Cable type	备注
SMA-JB3A	SFT-50-3-1	无插针




SMA-JB2A等



电缆剥线尺寸
Cable stripping dimension




Type	d	Cable type	备注
SMA-JB2A	Φ2.2	SFT-50-2-1	可退螺套
SMA-JB3D	Φ3.6	SFT-50-3-1	可退螺套





系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KFD94



SMA-KFD98

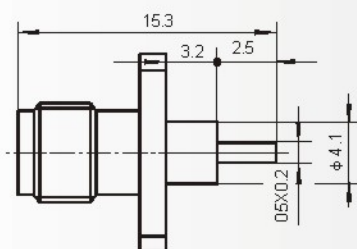


SMA-KFD100




Type	L	L1	L2
SMA-KFD100	16.5	7.0	3.0




SMA-KFD91




安装开孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD91	24.2	1.6	13.1	φ1.3	φ4.1	φ4.2
SMA-KFD101	27.5	15	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD103	19	7.5	2.0	φ1.3	φ4.1	φ4.2

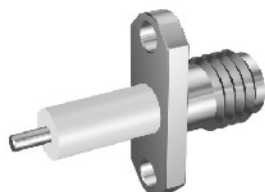

SMA-KFD102AG




安装开孔尺寸
Mounting hole









系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD108





SMA-KFD133G



Type	L	L1	L2	d
SMA-KFD133G	14.0	3.2	1.2	φ1.3





SMA-KFD142等



Type	L	L1	L2	d1	d2	D
SMA-KFD142	17.0	3.0	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD143	25.7	12.2	4.0	φ1.3	φ4.1	φ4.2
SMA-KFD147G	14.7	3.2	2.0	φ1.3	φ4.1	φ4.2
SMA-KFD150	27.5	15.0	3.0	φ1.3	φ4.1	φ4.2
SMA-KFD157	34.5	20.0	5.0	φ1.3	φ4.1	φ4.2





SMA-KFD140




Type	h	L	L1
SMA-KFD140	0.2	2.0	2.0




SMA-KFD144







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KFD145




安装开孔尺寸
Mounting hole




Type	L	L1	L2
SMA-KFD145	15.0	3.0	2.7



SMA-KFD148




安装开孔尺寸
Mounting hole




Type	L	L1	L2	h
SMA-KFD148	11.1	1.5	1.0	0.2



SMA-KFD149




安装开孔尺寸
Mounting hole




Type	L	L1	h	D
SMA-KFD149	12.0	2.5	0.15	*




SMA-KFD152




安装开孔尺寸
Mounting hole




Type	L	L1	d
SMA-KFD152	10.1	0.6	φ1.0




SMA-KFD153



安装开孔尺寸
Mounting hole









系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KFD154



SMA-KFD155G





SMA-KFD159等



Type	L	d	D
SMA-KFD159	12.2 ± 0.1	0.5	*
SMA-KFD159G	12.2 ± 0.1	0.5	*





SMA-KFD160等




Type	L	L1	L2	d
SMA-KFD160	15.5	4.0	2.0	1.0
SMA-KFD161	18.5	4.0	5.0	1.0
SMA-KFD162	22.5	4.0	9.0	1.0



SMA-KFD163







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-KFD164G 等




安装孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD164G	15.0	4	1.5	Φ0.8	Φ4	Φ4.1
SMA-KFaD-2.5P	14.5	2.5	2.5	Φ1.3	Φ6	Φ6.1



SMA-KFD164 等




安装孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD 164	15.0	1.5	12.2 ± 0.1	Φ0.8	Φ4.1	Φ4.2
SMA-KFD 165	15.0	1.5	10.2 ± 0.1	Φ0.8	Φ4.1	Φ4.2
SMA-KFD 166	14.3	0.8	12.2 ± 0.1	Φ0.6	Φ4.1	Φ4.2



SMA-KFD103 等




安装孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD 177	20.5	8.0	3.0	Φ1.3	Φ4.1	Φ4.2
SMA-KFD 178	18.7	5.0	4.2	Φ1.3	Φ4.1	Φ4.2



SMA-KFD179 等




安装孔尺寸
Mounting hole




Type	L	L1	L2	d1	d2	D
SMA-KFD 179	15.5	3.0	3.0	Φ1.3	Φ6.0	Φ6.1
SMA-KFD 194	18.5	4.0	5.0	Φ1.3	Φ6.0	Φ6.1
SMA-KFD 198	15.6	4.0	2.0	Φ0.8	Φ4.8	Φ4.9
SMA-KFD 199	14.4	2.4	2.5	Φ0.5	Φ5.2	Φ5.3
SMA-KFD 202	14.3	4.0	0.8	Φ0.6	Φ4.0	Φ4.1




SMA-KFD181 等




安装孔尺寸
Mounting hole





Type	L	L1	L2	d	D
SMA-KFD 181	17.0	5.0	2.5	Φ6	Φ6.1
SMA-KFD 181G	17.0	5.0	2.5	Φ6	Φ6.1
SMA-KFD 206G	21.2	6.6	6.6	Φ6	Φ6.1




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KFD182等





Type	L	L1	L2	t	d	D
SMA-KFD182	15.2	3.2	2.5	0.5	φ2.1	φ2.2
SMA-KFD200	13.2	1.5	2.5	0.65	φ4.1	φ4.2

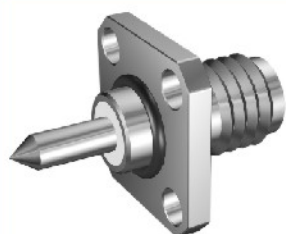



SMA-KFD183





SMA-KFD184




SMA-KFD185



SMA-KFD188







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KFD189 等




安装开孔尺寸
Mounting hole





Type	L	L1	L2	d1	d2	D
SMA-KFD189	17.5	6.0	2.0	φ1.3	φ4.1	φ42
SMA-KFD203	21.5	4.0	8.0	φ1.3	φ4.1	φ42
SMA-KFD5A	15.5	4.0	2.0	φ1.3	φ4.1	φ42
SMA-KFD205	81	62	9.5	φ1.3	φ4.1	φ42




SMA-KFD193




安装开孔尺寸
Mounting hole




SMA-KFD195




安装开孔尺寸
Mounting hole




SMA-KFD196G




安装开孔尺寸
Mounting hole



SMA-KFD197 等




安装开孔尺寸
Mounting hole



Type	L	L1	L2	d1	d2	D
SMA-KFD197	23.5	12	2.0	φ1.3	φ4.1	φ42
SMA-KFD201	24	9	5.5	φ1.3	φ4.1	φ42









系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS






SMA-KFD204





SMA-KFD207G





SMA-KFD208



SMA-KWFD




SMA-KWFD1 等



Type	L	L1
SMA-KWFD1	18.9	4
SMA-KWFD7	20.5	5.6









系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA-KWFD2





SMA-KWFD3





SMA-KFDC (铅封)




SMA-KYD

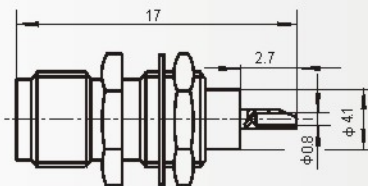

SMA-KYD1

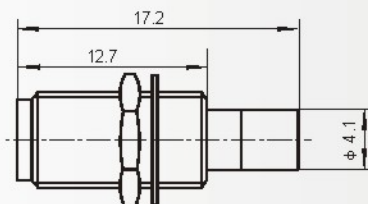





系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KYD2

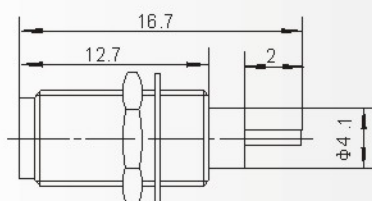


安装开孔尺寸
Mounting hole



SMA-KYD3 等

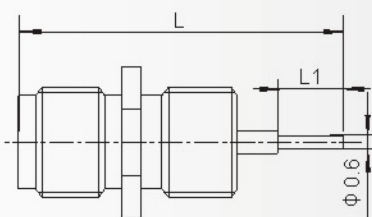


安装开孔尺寸
Mounting hole




Type	L	L1
SMA-KYD3	16.6	2.8
SMA-KYD5	19.1	3.0




SMA-KYD14

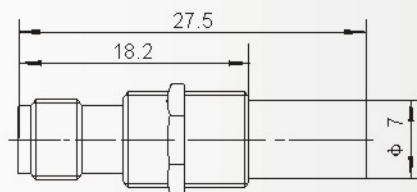


SMA-KYD18

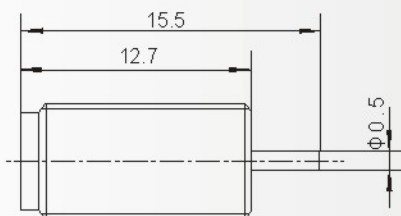

SMA-KYD22

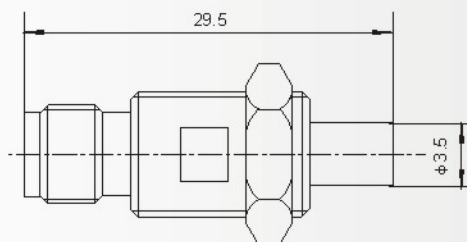





系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS



SMA-JB3B




电缆剥线尺寸
Cable stripping dimensions



Type	Cable type	备注
SMA-JB3B	SFT-50-3-1	无插针 可退螺套



SMA-JWB2等




电缆剥线尺寸
Cable stripping dimensions




Type	d	Cable type
SMA-JWB2	Φ2.2	SFT-50-2-1
SMA-JWB3	Φ3.6	SFT-50-3-1




SMA-KFB1等



安装开孔尺寸
Mounting hole




电缆剥线尺寸
Cable stripping dimensions




Type	d	D	L	Cable type
SMA-KFB1	Φ1.2	Φ3.2	12.7	SFT-50-1
SMA-KFB2a	Φ2.2	Φ3.5	12.7	SFT-50-2-1
SMA-KFB3a	Φ3.6	Φ5	14.2	SFT-50-3-1




SMA-KFB2等



安装开孔尺寸
Mounting hole




电缆剥线尺寸
Cable stripping dimensions



Type	d	D	L	Cable type
SMA-KFB2	Φ2.2	Φ3.5	12.7	SFT-50-2-1
SMA-KFB3	Φ3.6	Φ5.0	14.2	SFT-50-3-1




SMA-KB2等



电缆剥线尺寸
Cable stripping dimensions




Type	d	Cable type
SMA-KB2	Φ 2.2	SFT-50-2-1
SMA-KB3	Φ 3.6	SFT-50-3-1




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KYD23



SMA-KYD26




SMA-KYD27G等

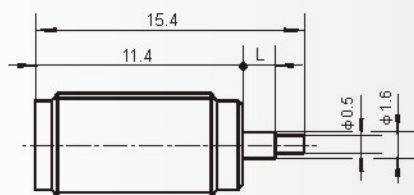


Type	L
SMA-KYD27G	1.6
SMA-KYD28G	2.1




SMA-KYD31



SMA-KYD32

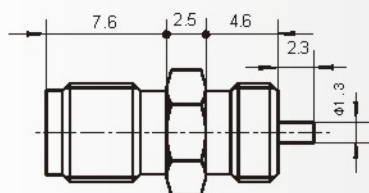






系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KYD33

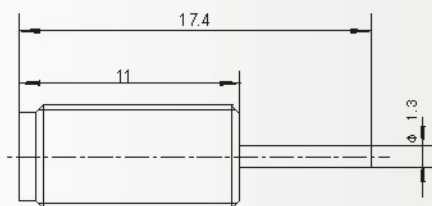


SMA-KYD34

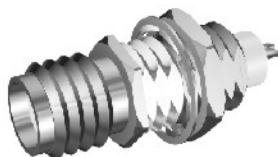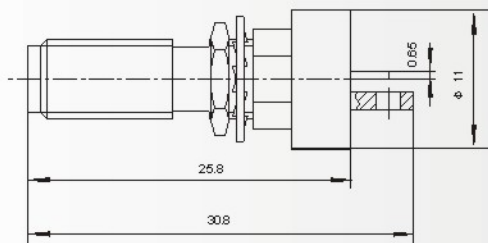


SMA-KYD35

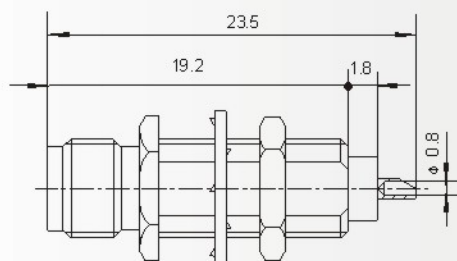


安装开孔尺寸
Mounting hole




SMA-KYD36




安装开孔尺寸
Mounting hole



SMA (M)-KYD (气密封)








系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS





SMA (M) -KYD1 (气密封)

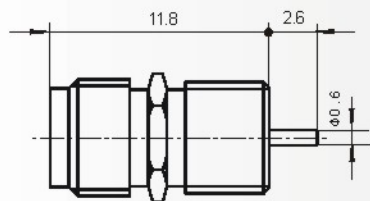



SMA(M)-KFD (气密封)



SMA(M)-KFD1 (水密封)
SMA(M)-KFD2 (水密封)





SMA (M) -KFD14等 (气密封)

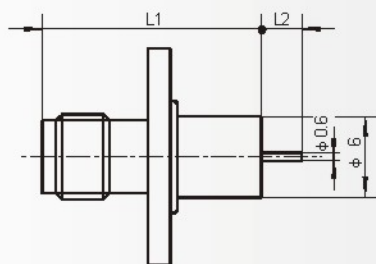

Type	L1	L2
SMA(M)-KFD14	15.6	1.8
SMA(M)-KFD3	16.2	3
SMA(M)-KFD7	18.8	2.8



SMA(M)-KFD9 (水密封)



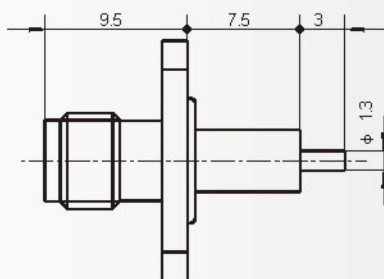







系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS






SMA (M)-KFD13 (气密封)

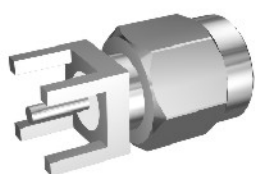




SMA-JHD

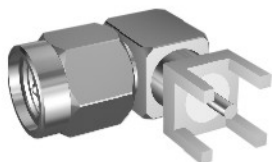



SMA-JWHD

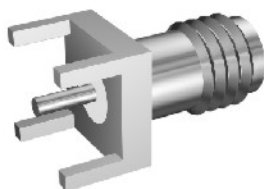


SMA-KHD

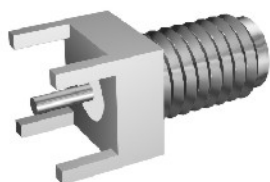

SMA-KHD1等




Type	L	L1	L2	d	D
SMA-KHD1	17.7	10.0	4.2	Φ1.0	Φ1.1
SMA-KHD2	34.0	11.0	3.0	Φ0.8	Φ0.9
SMA-KHD3	29.0	11.0	3.0	Φ0.8	Φ0.9




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KHD9等




安装开孔尺寸
Mounting hole




Type	A
SMA-KHD9	2.0
SMA-KHD9A	1.8
SMA-KHD9B	2.2

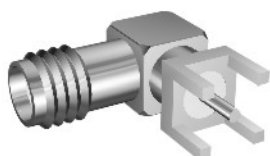


SMA-KWHD











安装开孔尺寸
Mounting hole






系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS

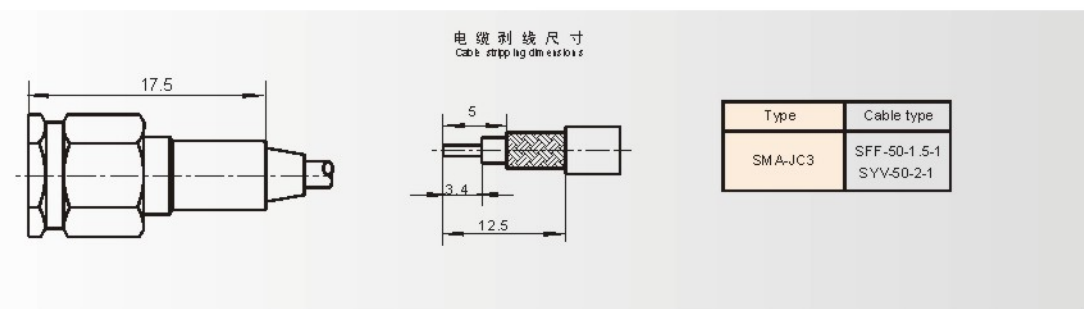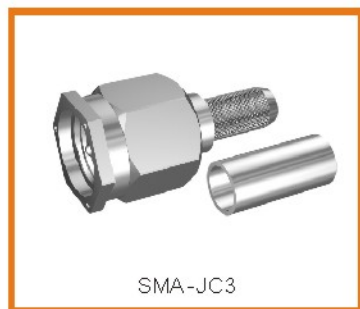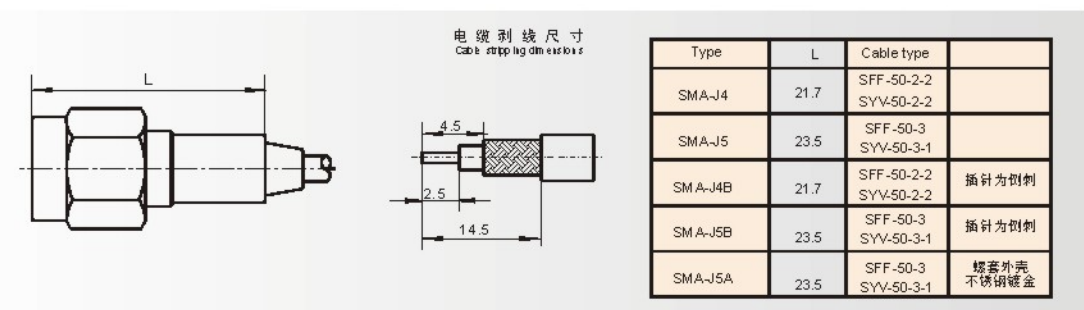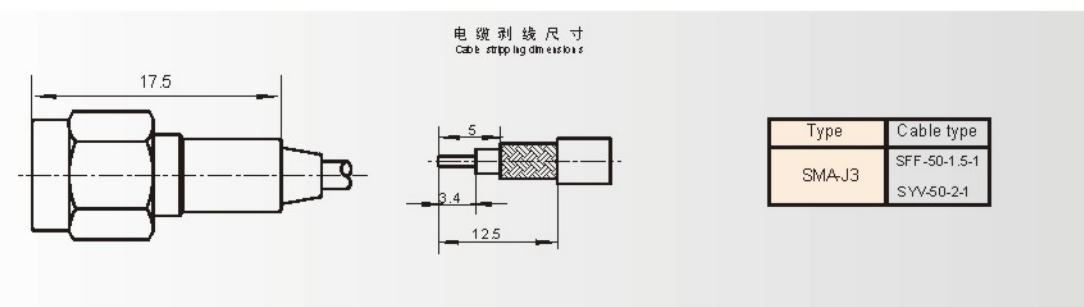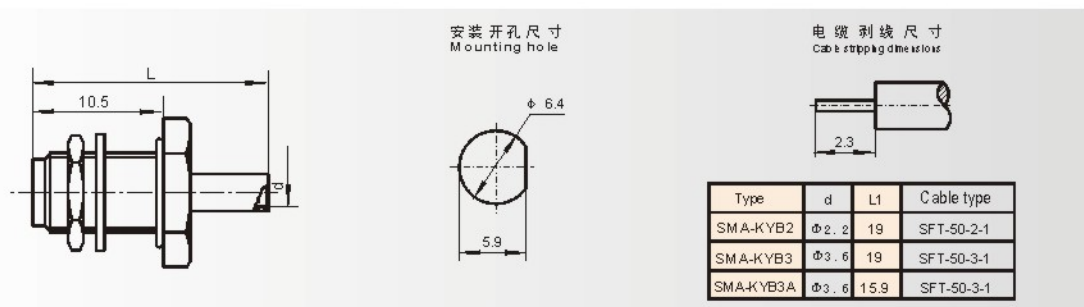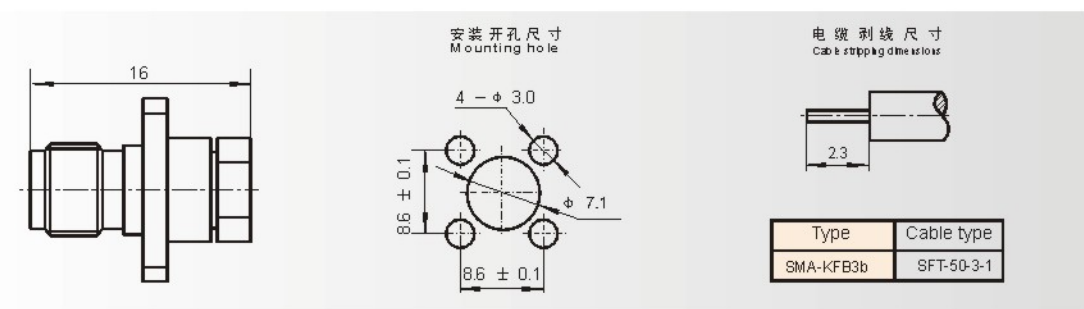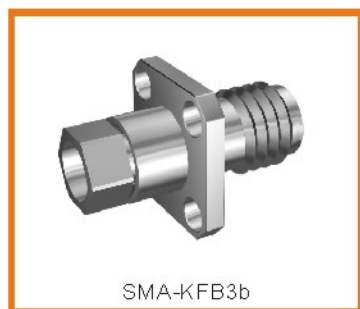




系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS

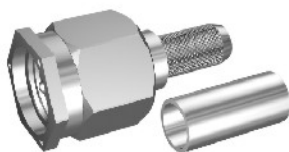

SMA-JC4等

电缆剥线尺寸
Cable stripping dimensions

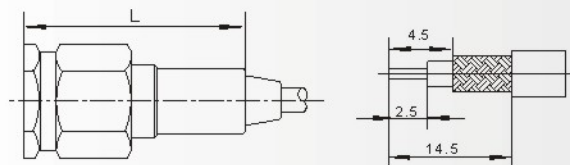


Type	L	Cable type
SMA-JC4	21.7	SFF-50-2-2 SYV-50-2-2
SMA-JC5	23.5	SFF-50-3 SYV-50-3-1



SMA-JW2等

电缆剥线尺寸
Cable stripping dimensions

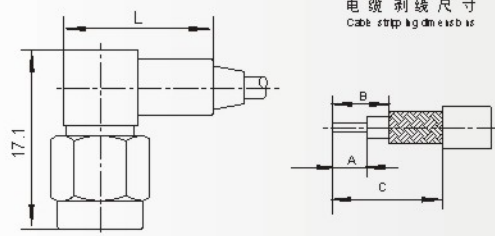


Type	L	A	B	C	Cable type
SMA-JW2	13.0	2.7	4.6	8.5	SFF-50-1 SYV-50-1
SMA-JW3	13.0	2.7	4.6	8.5	SFF-50-1.5-1 SYV-50-2-1
SMA-JW4	16.0	2.7	5.2	15.5	SFF-50-2-2 SYV-50-2-2
SMA-JW5	18.0	2.7	5.2	15.5	SFF-50-3-1 SYV-50-3



SMA-JWC3等

电缆剥线尺寸
Cable stripping dimensions

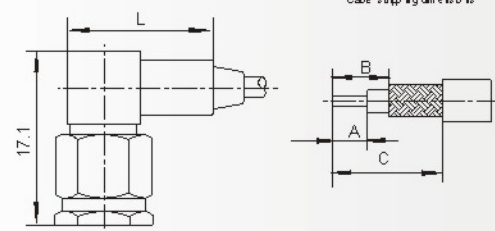


Type	L	A	B	C	Cable type
SMA-JWC2	13.0	2.7	4.6	8.5	SFF-50-1 SYV-50-1
SMA-JWC3	13.0	2.7	4.6	8.5	SFF-50-1.5-1 SYV-50-2-1
SMA-JWC4	16.0	2.7	5.2	15.5	SFF-50-2-2 SYV-50-2-2
SMA-JWC5	18.0	2.7	5.2	15.5	SFF-50-3-1 SYV-50-3



SMA-K3等

电缆剥线尺寸
Cable stripping dimensions

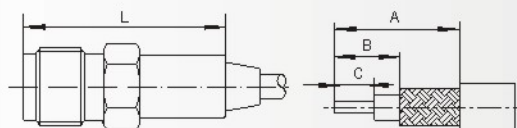


Type	L	A	B	C	Cable type
SMA-K3	17	2.7	4.6	8.7	SFF-50-1.5-1, SYV-50-2-1
SMA-K4	20	2.5	4.2	14.0	SFF-50-2-2, SYV-50-2-2
SMA-K5	22	2.5	4.2	14.0	SFF-50-3, SYV-50-3-1




SMA-KF3等


安装开孔尺寸
Mounting hole

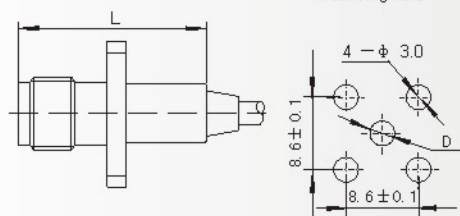

电缆剥线尺寸
Cable stripping dimensions




Type	A	B	C	D	L	Cable type
SMA-KF3	2.7	4.6	8.7	φ5.5	17	SFF-50-1.5-1, SYV-50-2-1
SMA-KF4	2.5	4.2	14.0	φ6.2	20	SFF-50-2-2, SYV-50-2-2
SMA-KF5	2.5	4.2	14.0	φ7.2	22	SFF-50-3, SYV-50-3-1



系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-KY3 等

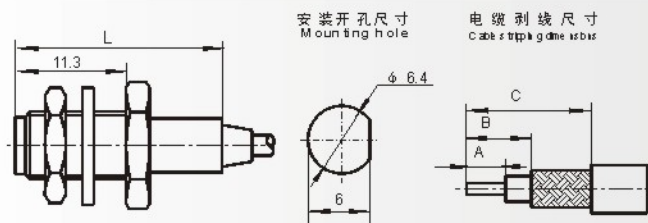


Type	L	Cable type	电缆剥线 尺寸同上
SMA-KY3	18.8	SFF-50-1.5-1 SYV-50-2-1	
SMA-KY4	21.2	SFF-50-2-2 SYV-50-2-2	
SMA-KY5	23.2	SFF-50-3-1 SYV-50-3	




SMA-J3-1

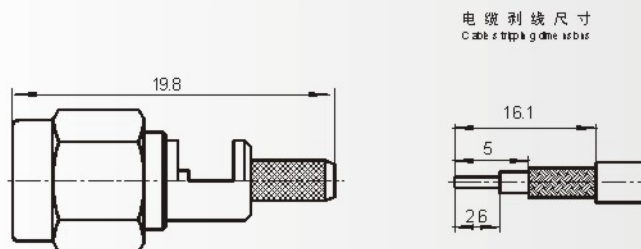

Type	Cable type
SMA-J3-1	SFF-50-1.5-1, SYV-50-2-1




SMA-J301S

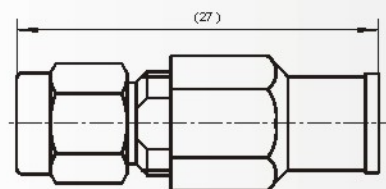

Type	Cable type
SMA-J301S	SFF-50-3-1




SMA-J301

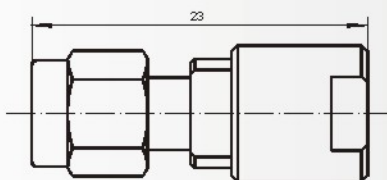


Type	Cable type
SMA-J301	SFF-50-3-5



SMA-JW301




Type	Cable type
SMA-JW301	SFF-50-3-5



系列射频同轴连接器
SERIES SMA COAXIAL CONNECTORS




SMA-K301




Type	Cable type
SMA-K301	SUV50-3-5




SMA(S)-KY2

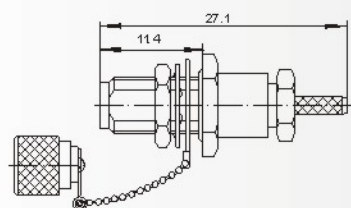

安装开孔尺寸
Mounting hole




电缆剥线尺寸
Cable stripping dimension




Type	Cable type
SMA(s)-KY2	SFF-50-1, SYV-50-1




SMA-KY2




安装开孔尺寸
Mounting hole




电缆剥线尺寸
Cable stripping dimension




Type	Cable type
SMA-KY2	SFF-50-1, SYV-50-1




系列射频同轴转接器
SERIES SMA COAXIAL CONNECTORS

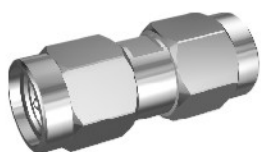



SMA-JJ

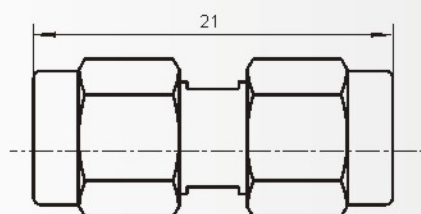


SMA-JK

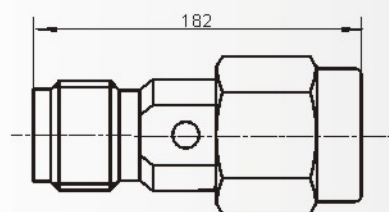

SMA-IW.1

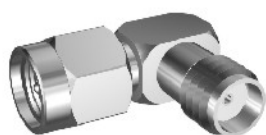

SMA-JWK



SMA-KK

