


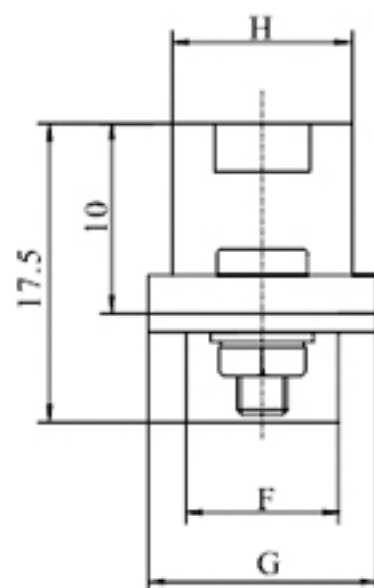
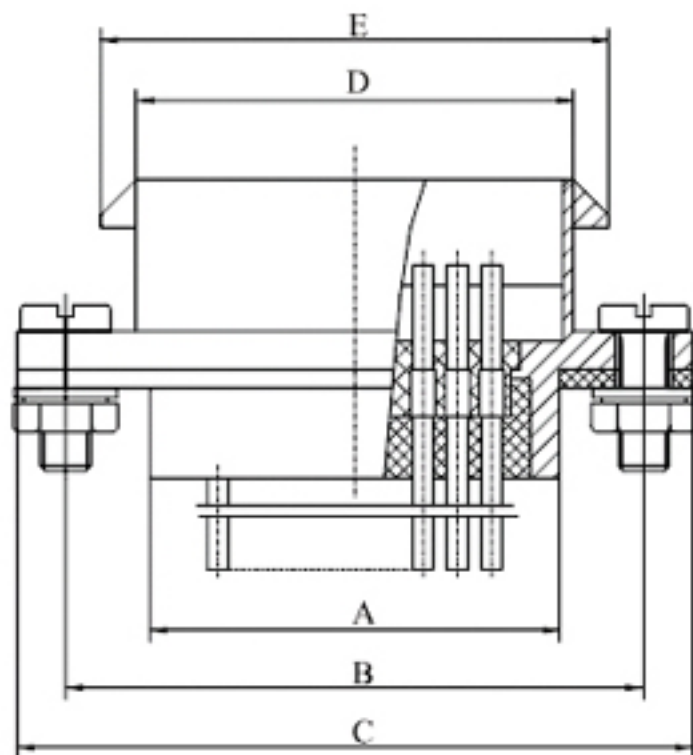
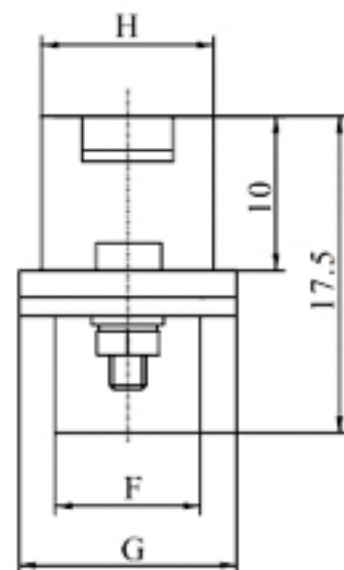
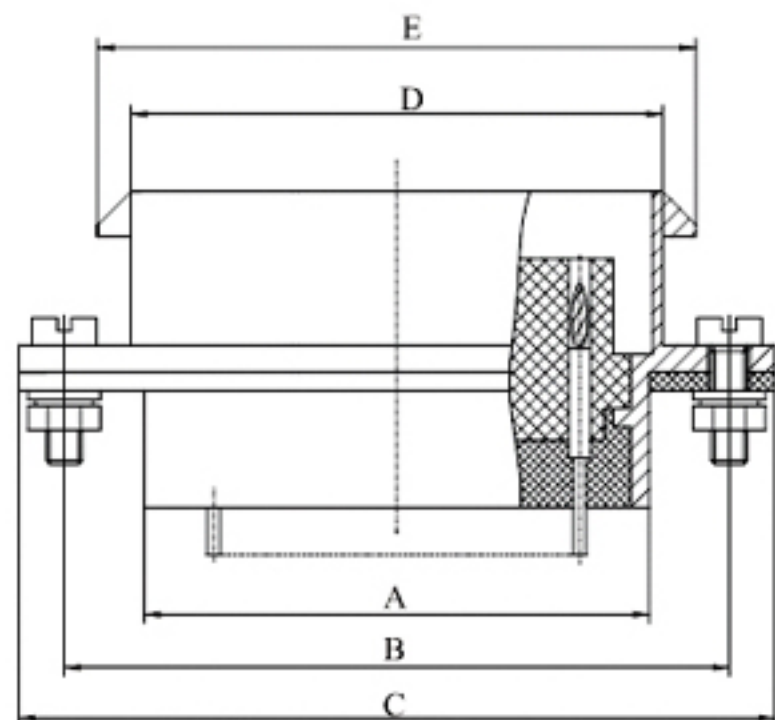


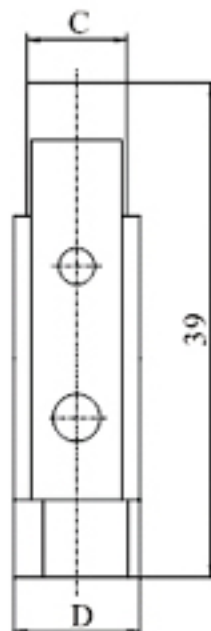



产品型号	外形尺寸							
	A	B	C	D	E	F	G	H
J24 (D) -9ZK	14.2	23	28	15.5	18.2	5.6	10	7.5
J24 (D) -19ZK	18.2	27	32	19.5	23.2	8.1	12	9.5
J24 (D) -25ZK	21.6	30.4	35.4	22.9	26.6	8.1	12	9.5
J24 (D) -37ZK	28.2	37	42	29.5	33.2	8.1	12	9.5
J24 (D) -52ZK	37.2	46	51	38.5	42.2	8.1	12	9.5
J24 (D) -74ZK	39.2	48	53	40.5	44.2	9.7	14	11.5

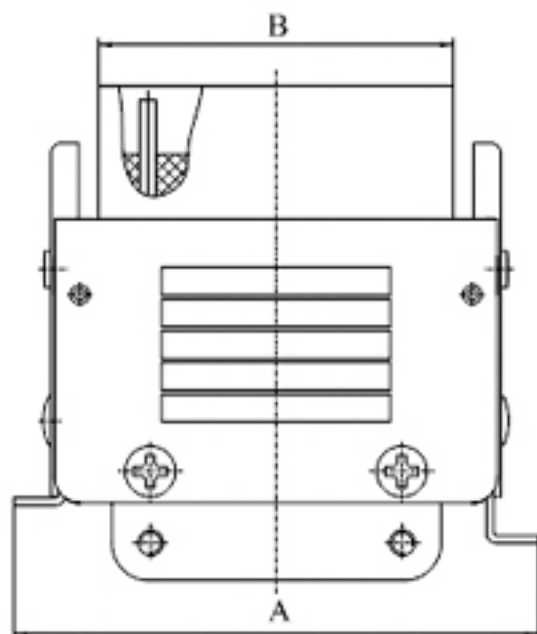



产品型号	外形尺寸							
	A	B	C	D	E	F	G	H
J24 (D) -9ZJ	14.2	23	28	15.5	18.2	5.6	10	7.5
J24 (D) -19ZJ	18.2	27	32	19.5	23.2	8.1	12	9.5
J24 (D) -25ZJ	21.6	30.4	35.4	22.9	26.6	8.1	12	9.5
J24 (D) -37ZJ	28.2	37	42	29.5	33.2	8.1	12	9.5
J24 (D) -52ZJ	37.2	46	51	38.5	42.2	8.1	12	9.5
J24 (D) -74ZJ	39.2	48	53	40.5	44.2	9.7	14	11.5

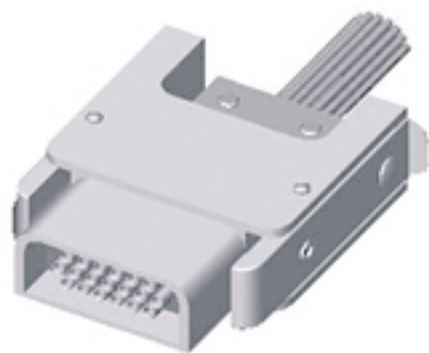




产品型号	外形尺寸			
	A	B	C	D
J24-9TK	25.2	14.2	6.2	8
J24-19TK	29.2	18.2	8.2	9.5
J24-25TK	32.6	21.6	8.2	9.5
J24-37TK	39.2	28.2	8.2	9.5
J24-52TK	48.2	37.2	8.2	9.5
J24-74TK	50.2	39.2	10.2	11.6

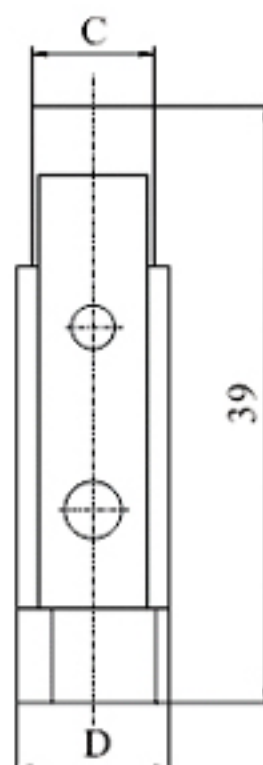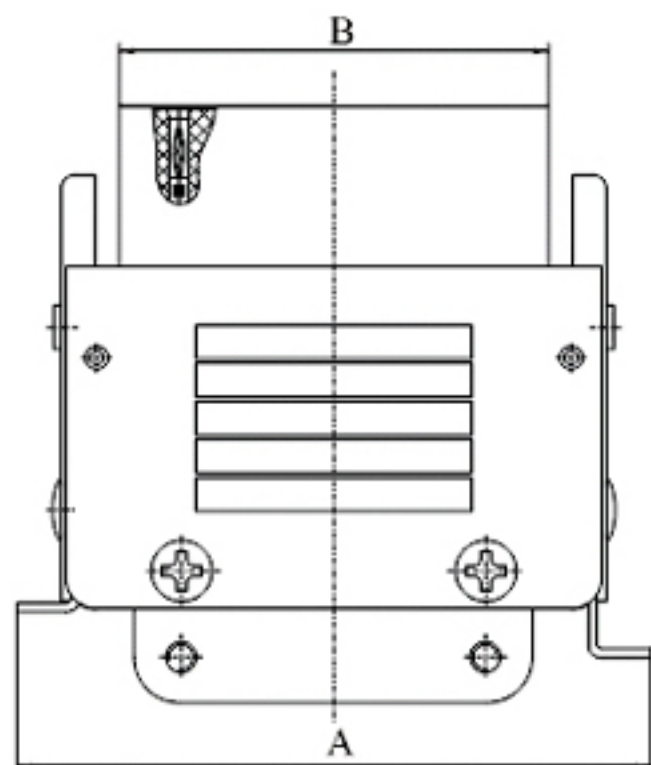



产品型号	外形尺寸			
	A	B	C	D
J24-9TJ	25.2	14.2	6.2	8
J24-19TJ	29.2	18.2	8.2	9.5
J24-25TJ	32.6	21.6	8.2	9.5
J24-37TJ	39.2	28.2	8.2	9.5
J24-52TJ	48.2	37.2	8.2	9.5
J24-74TJ	50.2	39.2	10.2	11.6

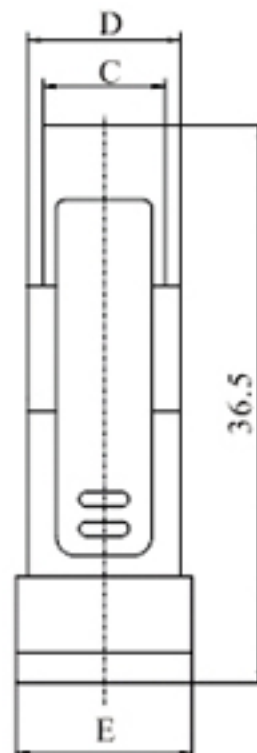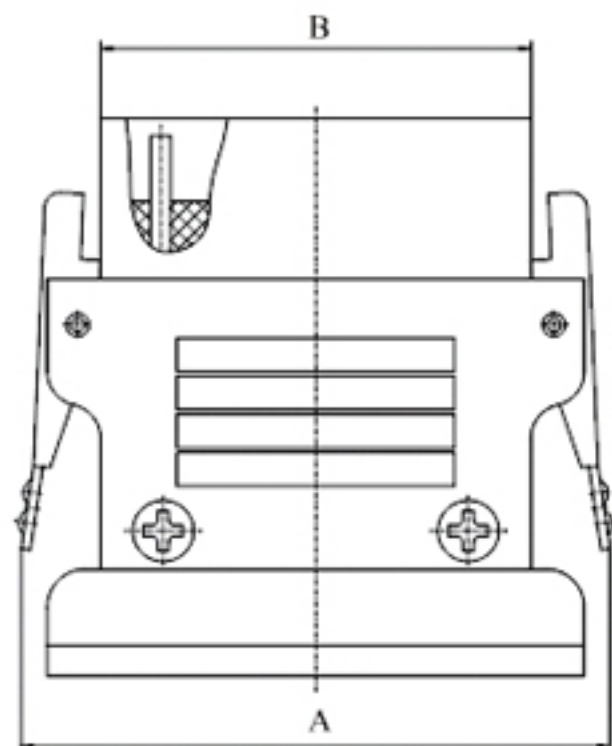


产品型号	外形尺寸				
	A	B	C	D	E
J24D-9TK-A1	25.2	14.2	6.2	8	9.5
J24D-19TK-A1	29.2	18.2	8.2	10	11.5
J24D-25TK-A1	32.6	21.6	8.2	10	11.5
J24D-37TK-A1	39.2	28.2	8.2	10	11.5
J24D-52TK-A1	48.2	37.2	8.2	10	11.5
J24D-74TK-A1	50.2	39.2	10.2	11.6	13.1

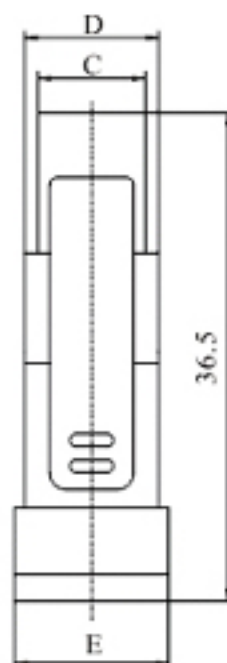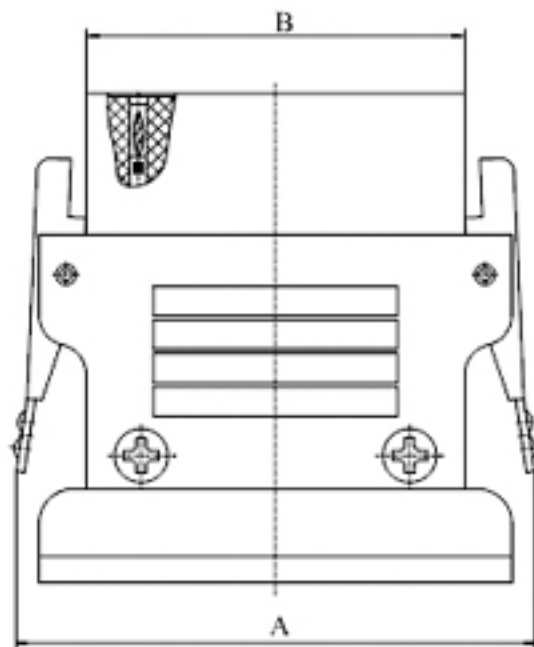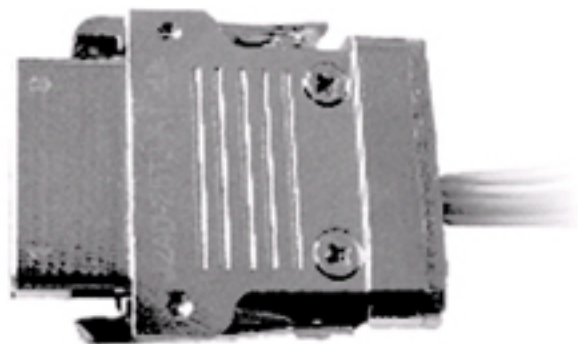

产品型号	外形尺寸				
	A	B	C	D	E
J24D-9TJ-A1	25.2	14.2	6.2	8	9.5
J24D-19TJ-A1	29.2	18.2	8.2	10	11.5
J24D-25TJ-A1	32.6	21.6	8.2	10	11.5
J24D-37TJ-A1	39.2	28.2	8.2	10	11.5
J24D-52TJ-A1	48.2	37.2	8.2	10	11.5
J24D-74TJ-A1	50.2	39.2	10.2	11.6	13.1

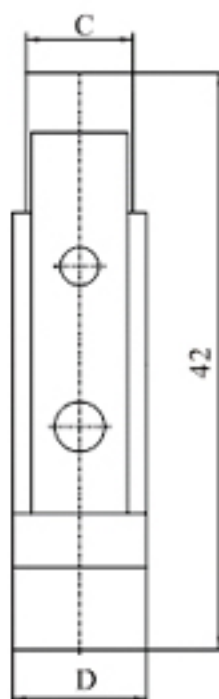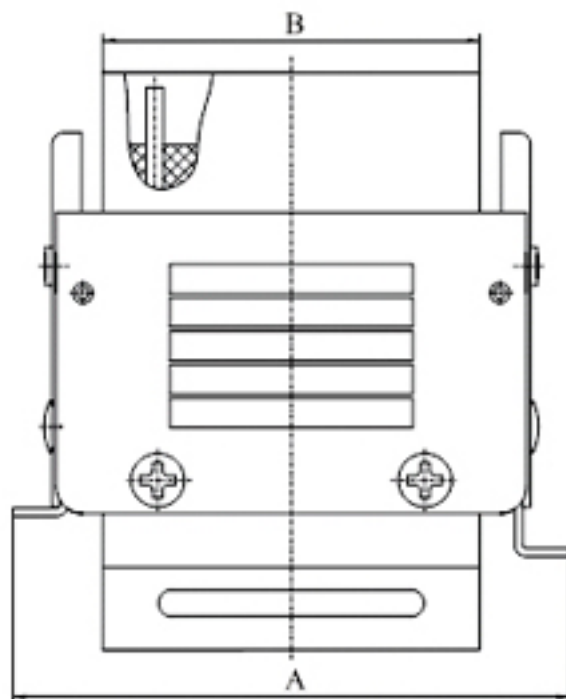

产品型号	外形尺寸			
	A	B	C	D
J24D-9TK	25.2	14.2	6.2	8
J24D-19TK	29.2	18.2	8.2	10
J24D-25TK	32.6	21.6	8.2	10
J24D-37TK	39.2	28.2	8.2	10
J24D-52TK	48.2	37.2	8.2	10
J24D-74TK	50.2	39.2	10.2	11.6

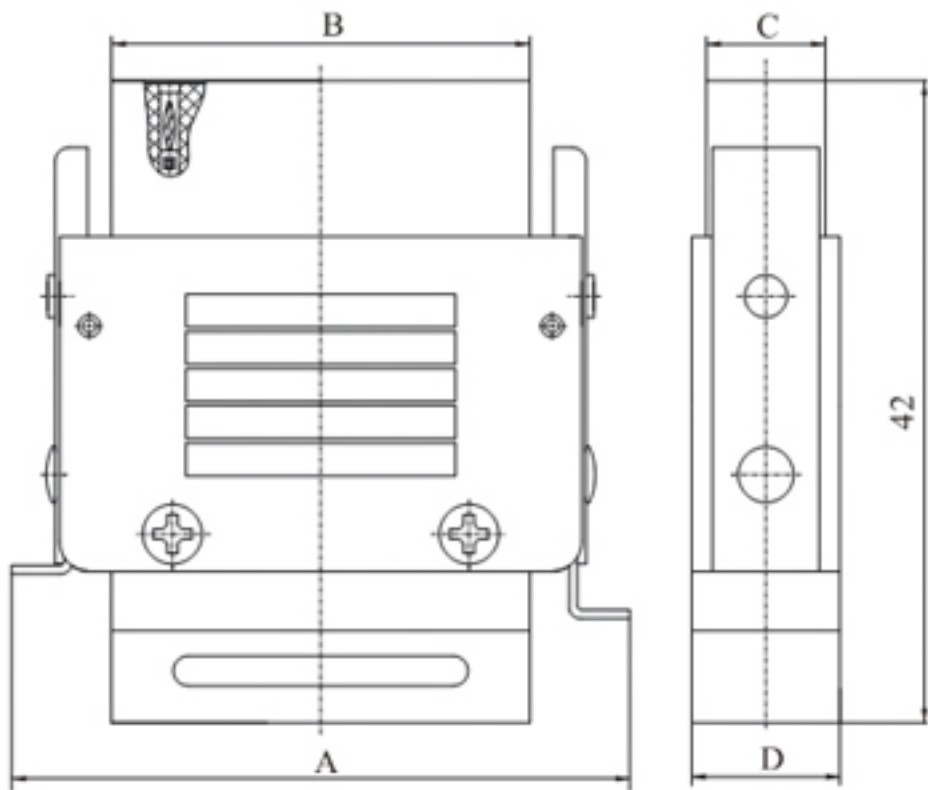

产品型号	外形尺寸			
	A	B	C	D
J24D-9TJ	25.2	14.2	6.2	8
J24D-19TJ	29.2	18.2	8.2	10
J24D-25TJ	32.6	21.6	8.2	10
J24D-37TJ	39.2	28.2	8.2	10
J24D-52TJ	48.2	37.2	8.2	10
J24D-74TJ	50.2	39.2	10.2	11.6

J24 (D) 系列插针连接器孔位排列图 (从对插面看)

4 1
9 5

6 1
13 7
19 14

8 1
17 9
25 18

12 1
25 13
37 26

17 1
35 18
52 36

18 1
37 19
55 38
74 56

技术参数			
使用环境条件		主要技术特性	
环境温度	-55~+125℃	工作电流	4A max
相对湿度	40℃.98%	接触电阻	≤10mΩ
大气压力	4.4KPa	绝缘电阻	≥5000MΩ
振 动	10~2000Hz.254m/s ²	耐 压	800V
冲 击	980m/s ²	寿 命	1000次
离 心	980m/s ²		