

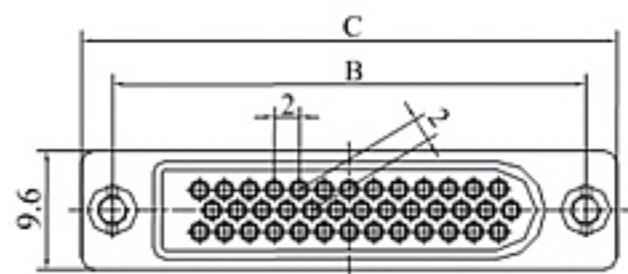
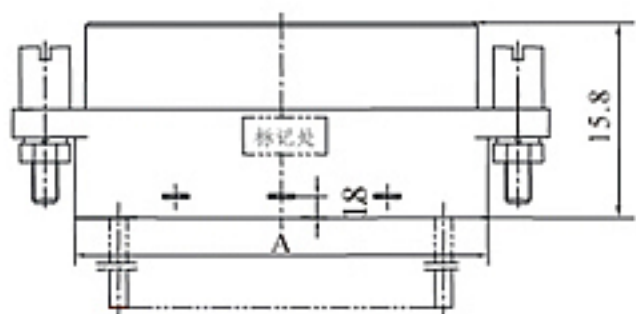
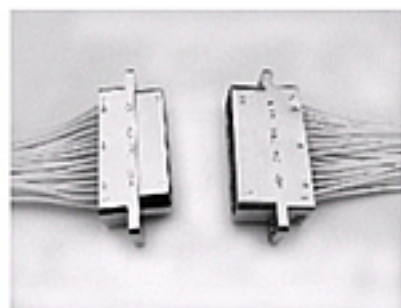



J40-39TJ(CDbD-39TJ)
J40-51TJ(CDbD-51TJ)

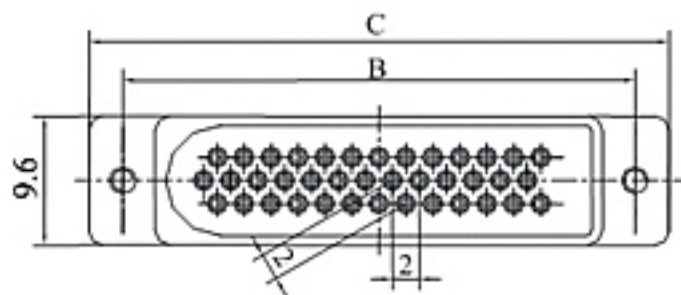

J40-39ZK(CDbD-39ZK)
J40-51ZK(CDbD-51ZK)

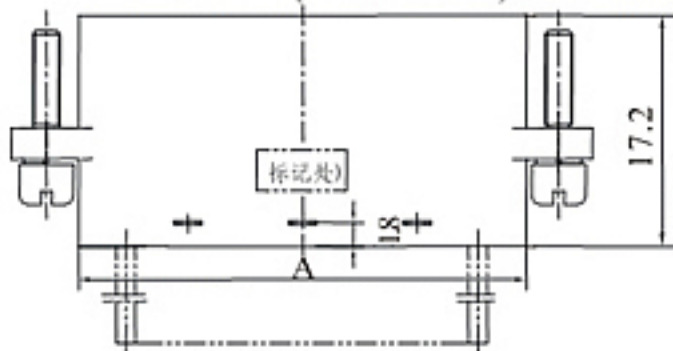



J40系列插针连接器孔位排列图

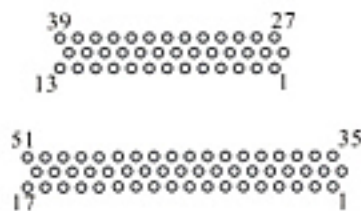

产品型号	A	B	C
J40-39	33.2	38	42.8
J40-51	41.2	46	50.8




J40-39TJ(CDbD-39TJ)

J40-51TJ(CDbD-51TJ)

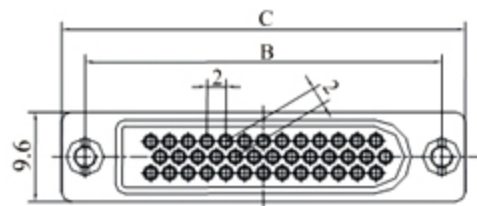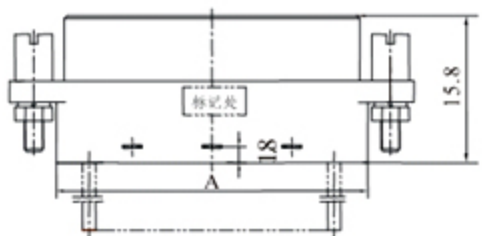


J40-39ZK(CDbD-39ZK)

J40-51ZK(CDbD-51ZK)

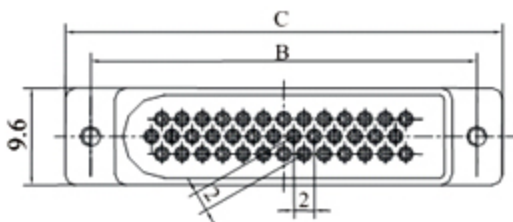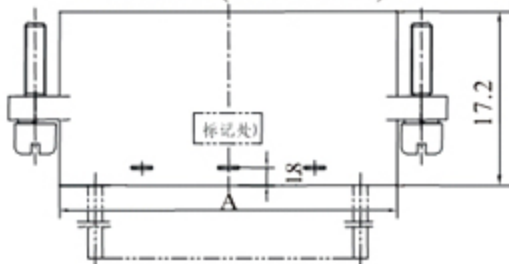

J40系列插针连接器孔位排列图



产品型号	A	B	C
J40-39	33.2	38	42.8
J40-51	41.2	46	50.8

技术参数			
使用环境条件		主要技术特性	
环境温度	-55~+125℃	工作电流	5A max
相对湿度	40℃.98%	接触电阻	≤10mΩ
大气压力	4.4KPa	绝缘电阻	≥5000MΩ
振 动	10~2000Hz.196m/s ²	耐 压	800V
冲 击	490m/s ²	寿 命	500 次