

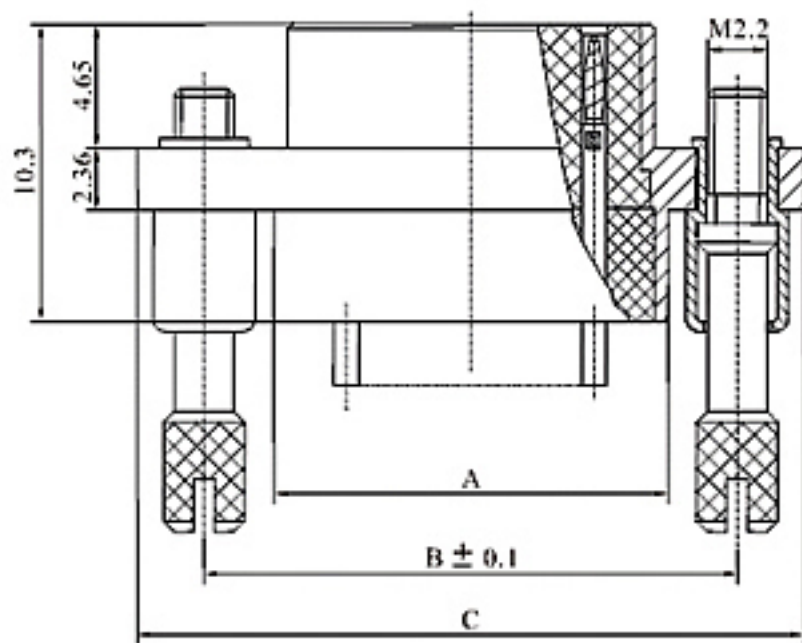



产品型号	A	B	C
ZCDbA-15TJYL1	19.96	24.51	29.71
ZCDbA-21TJYL1	27.68	32.12	37.33

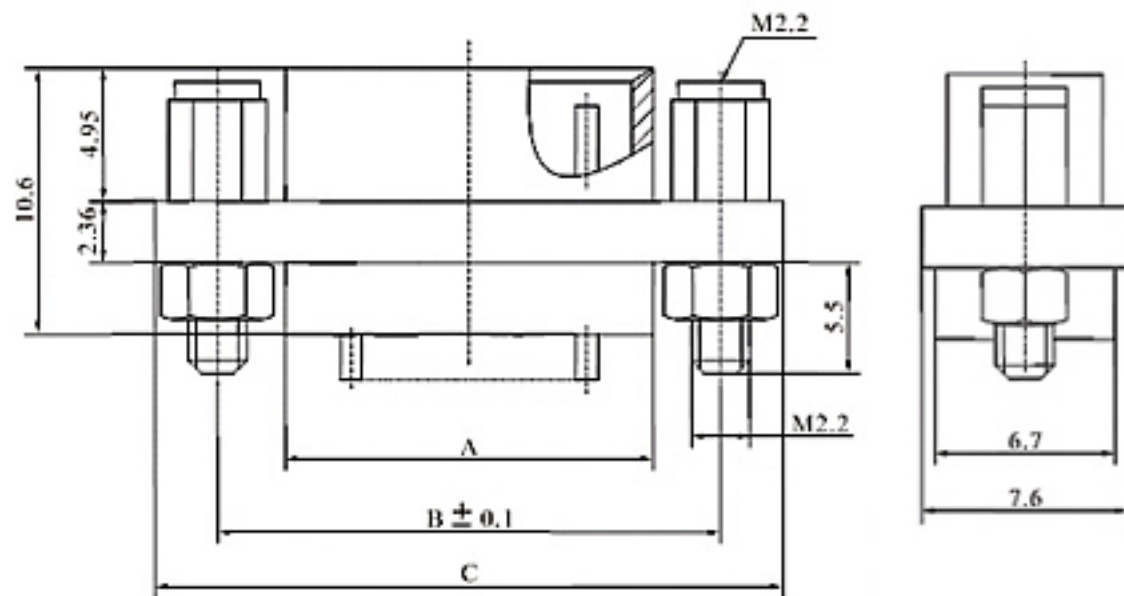

产品型号	A	B	C
ZCDbA-15ZKYP1	19.96	24.51	29.71
ZCDbA-21ZKYP1	27.68	32.12	37.33

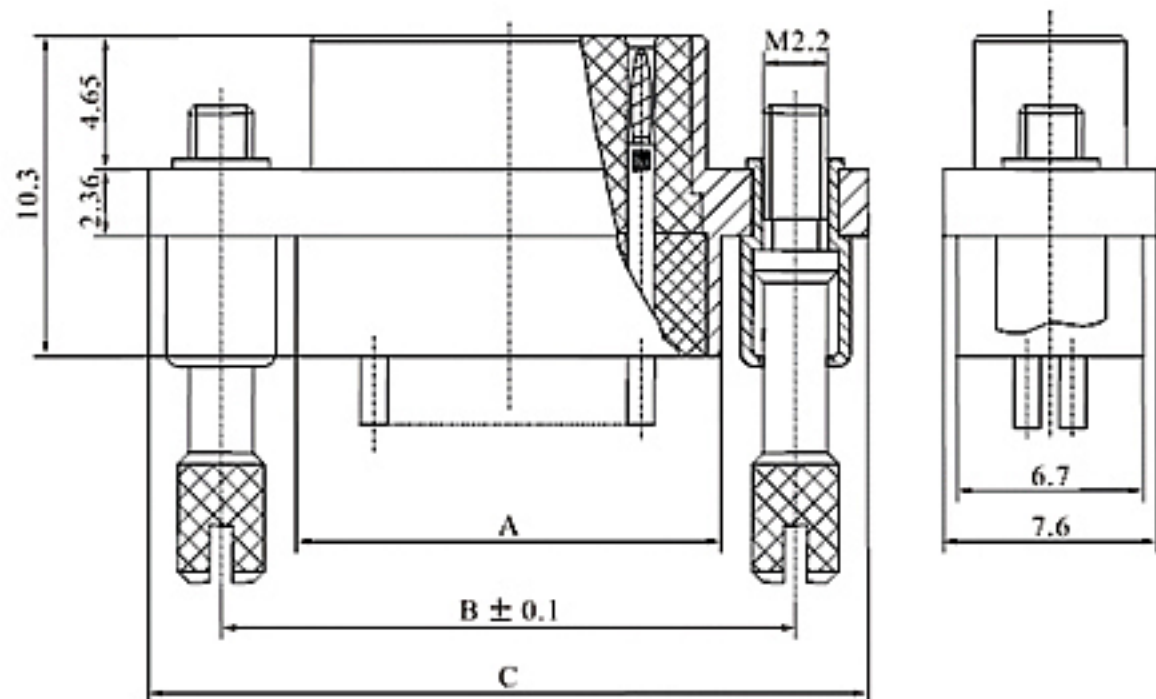


产品型号	A	B	C
ZCDbA-15TJYML1	19.96	26.51	33.71
ZCDbA-21TJYML1	27.68	34.12	41.33



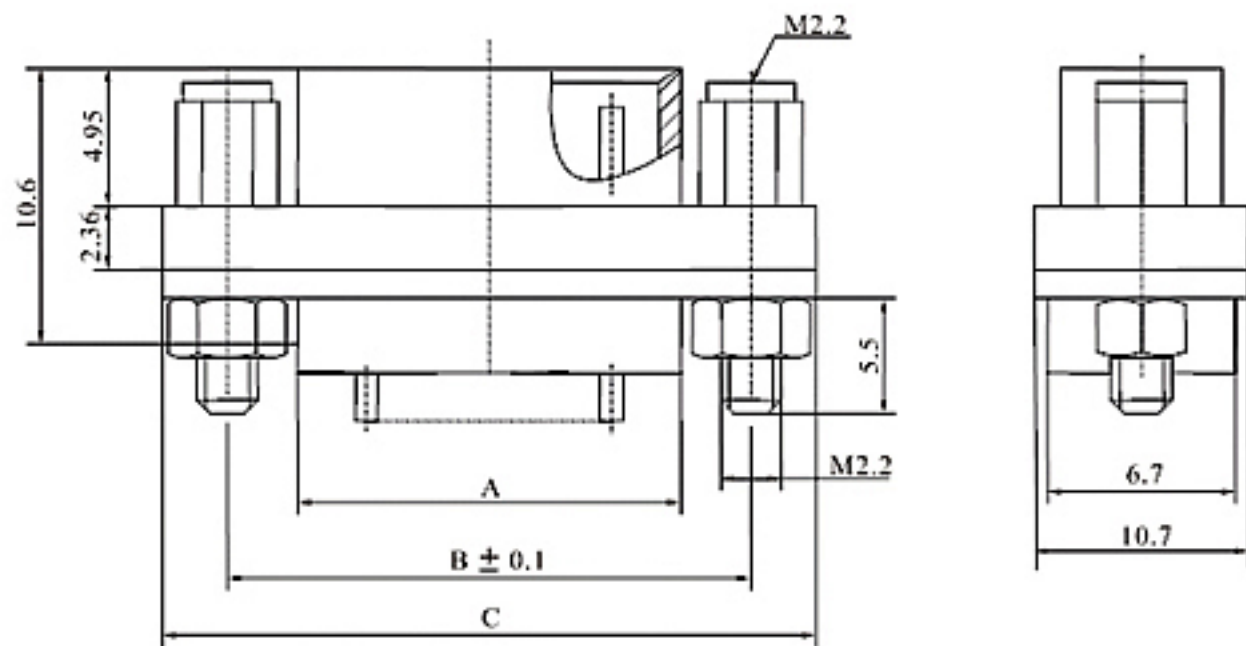


产品型号	A	B	C
ZCDbA-15ZKYMP1	19.96	26.51	33.71
ZCDbA-21ZKYMP1	27.68	34.12	41.33



ZCDbA-44TYM

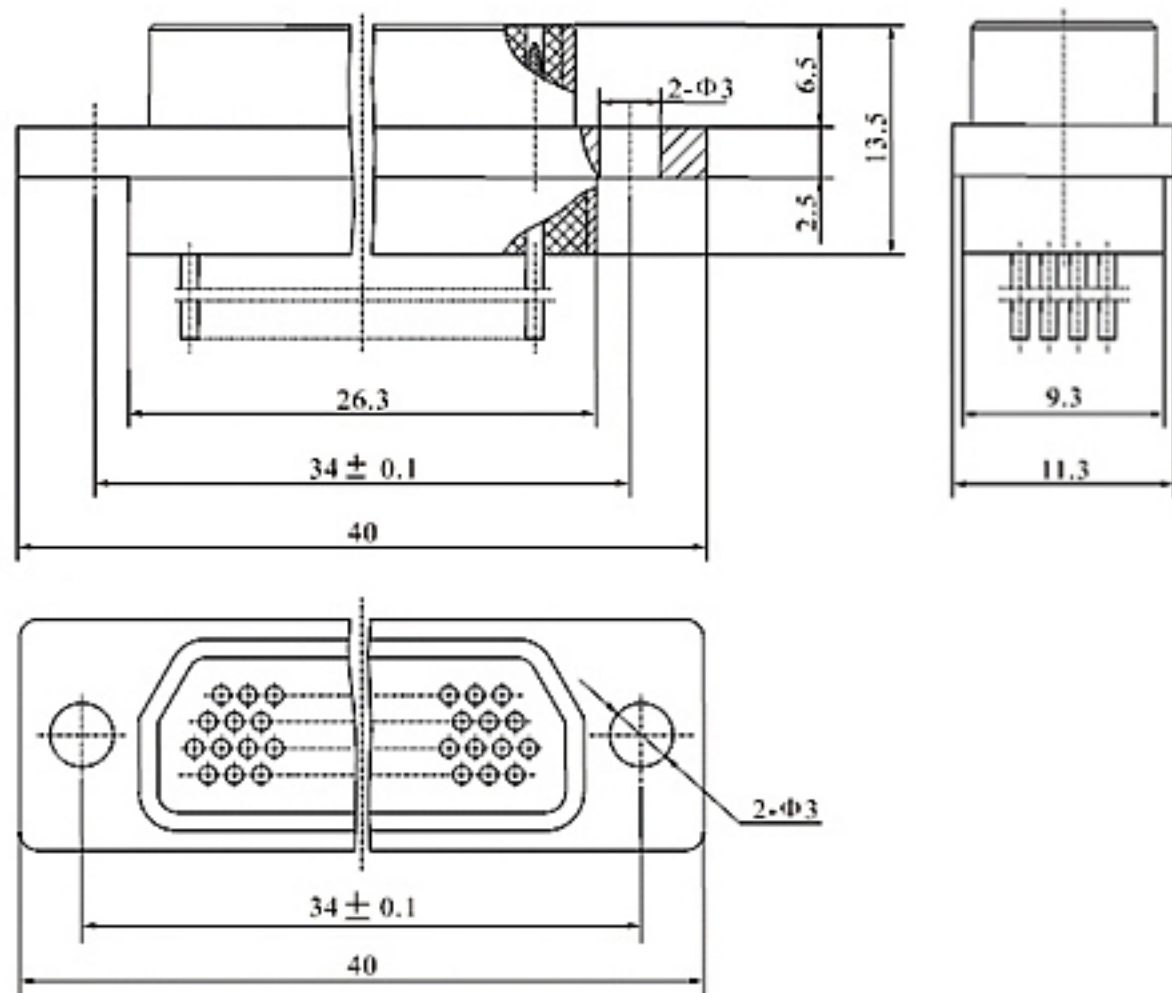


ZCDBA-44ZYM

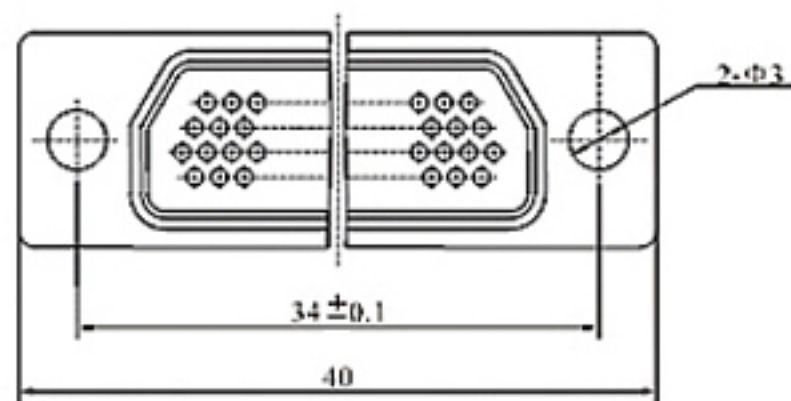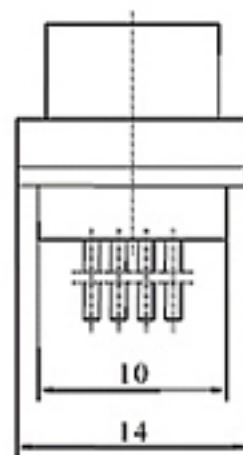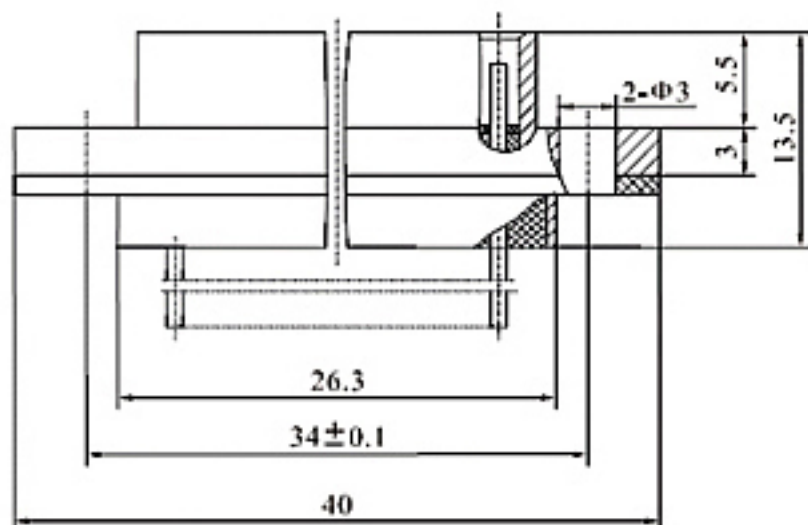


ZCDbA-56TY

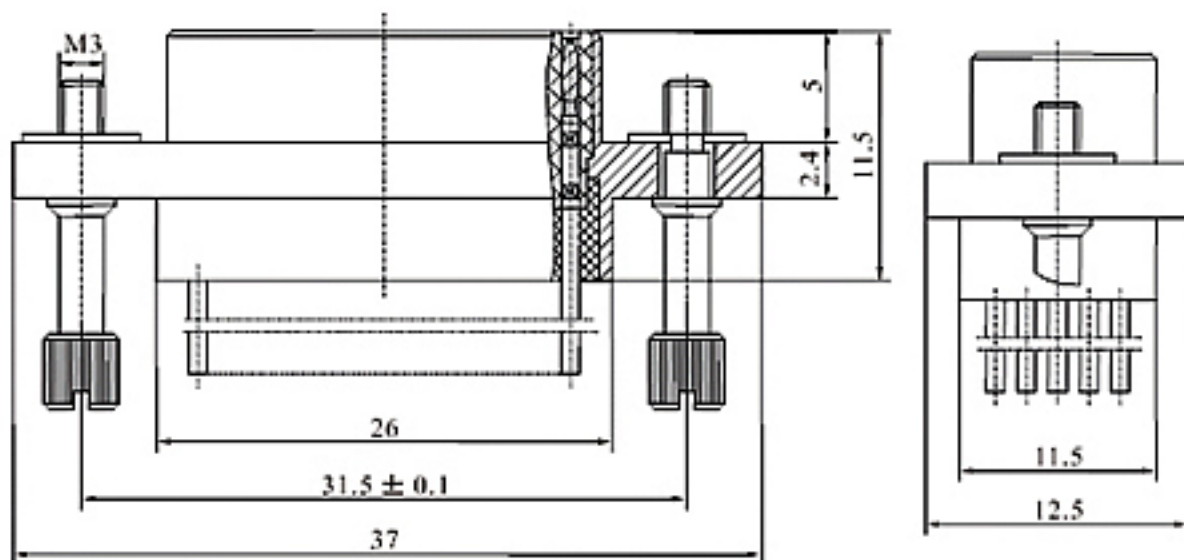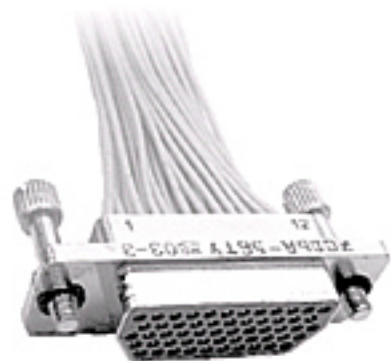


4、CDbA带金属护线壳系列连接器

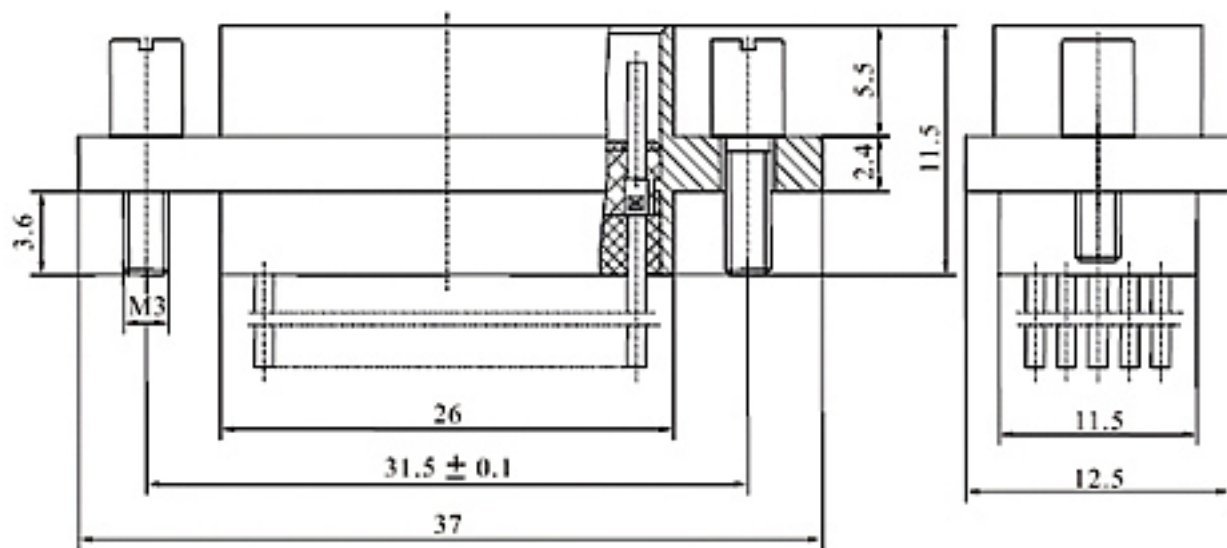

ZCDbA-56TYM

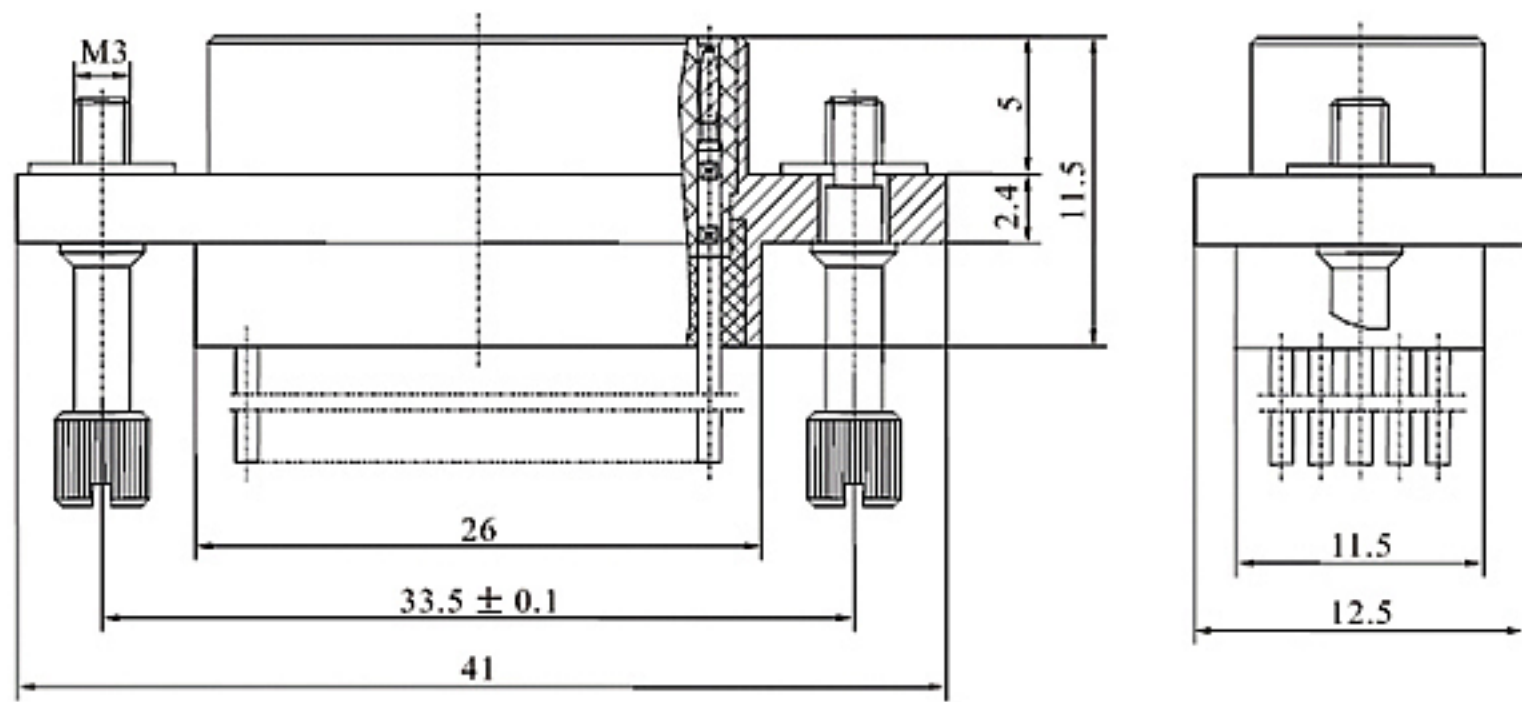

ZCDbA-56ZYM

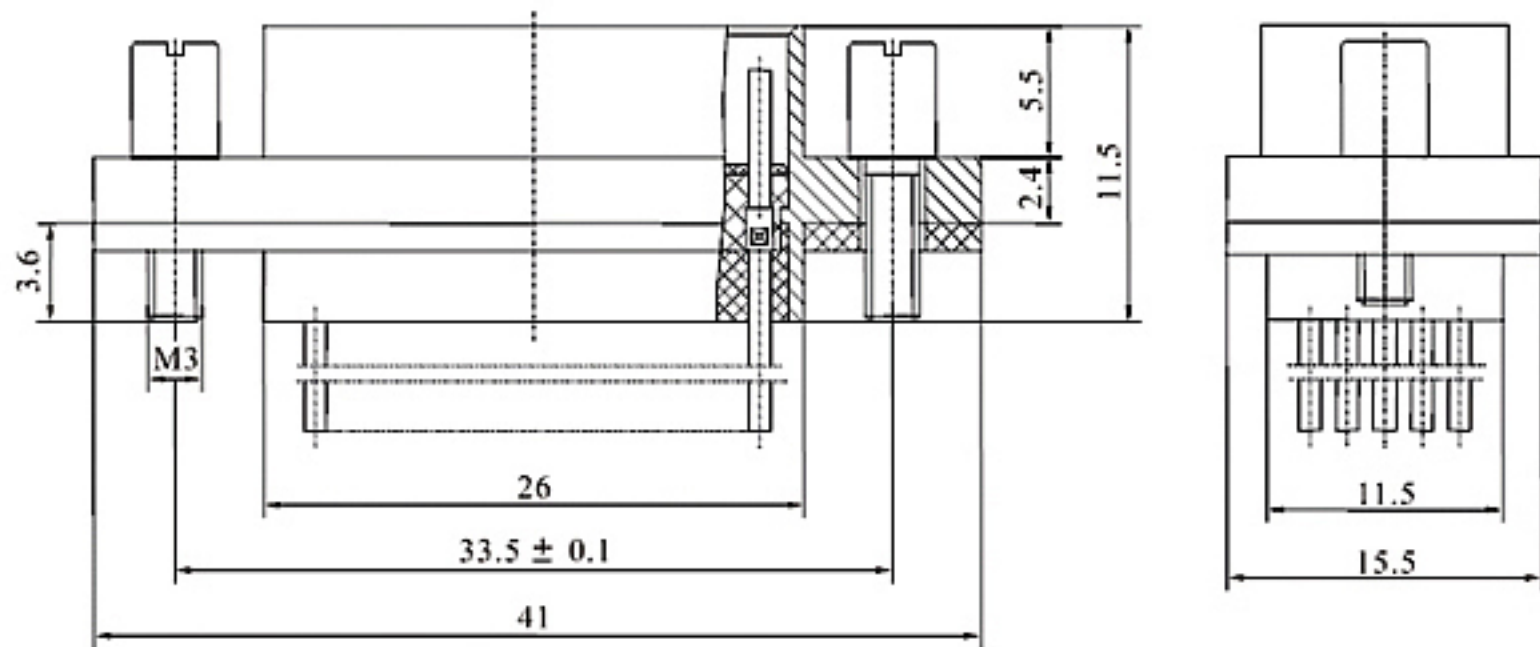


孔位排列表

ZCDbA系列插针连接器孔位排列图（从对插面看）



ZCDbA-15TJYL1, ZCDbA-15TJYML1

间距为2.2mm, 排距为1.7mm。

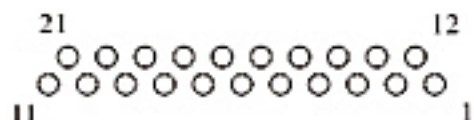

ZCDbA-21TJYL1, ZCDbA-21TJYML1

间距为2.3mm, 排距为1.5mm。



ZCDbA-44TYM 间距为1.91mm, 排距为1.65mm。



ZCDbA-56TY, ZCDbA-56TYM

间距为1.91mm, 排距为1.65mm。

技术参数			
使用环境条件		主要技术特性	
环境温度	-55~+125℃	工作电流	5A max
相对湿度	40℃.98%	接触电阻	≤8mΩ
大气压力	4.4KPa	绝缘电阻	≥5000MΩ
振 动	10-2000Hz.196m/s ²	耐 压	800V
冲 击	735m/s ²	寿 命	500 次