

The logo for TRC, consisting of the letters 'TRC' in a bold, stylized, metallic font, enclosed within a rectangular border.

系列射频同轴连接器
SERIES TRC RF COAXIAL CONNECTORS



TRC三同轴连接器是一种新型卡口式 75Ω 接头连接器，较BNC系列体积小，性能优越，用于通讯设备及现代抗干扰器武器系统，具有良好的屏蔽性能。

Series TRC RF coaxial connectors are one new kind of 75Ω -bayonet coupling connectors, which have high shielding performances and more excellent than BNC . They are widely used in communication equipment and the system of modem anti-jamming weapon .

主要技术特性		KEY PERFORMANCE		
温度范围 Temperature range	-65~+165°C	绝缘电阻 Insulation resistance		≥5000MΩ
特性阻抗 Characteristic Impedance	75Ω	介质耐压 Dielectric Withstanding voltage	中心导体与 中心导体间	≥1000V
频率范围 Frequency range	DC - 4.0 GHz		中心导体与 外导体间	≥500V
射频泄漏 RF Leak	-90dB	寿命 Durability		500Cycles



头部配合尺寸

INTERFACE MATING DIMENSIONS

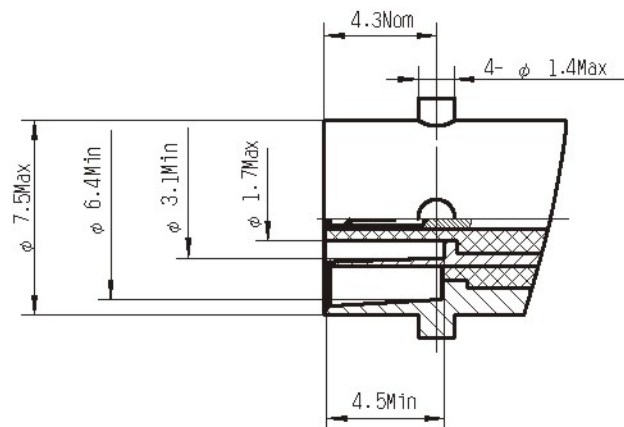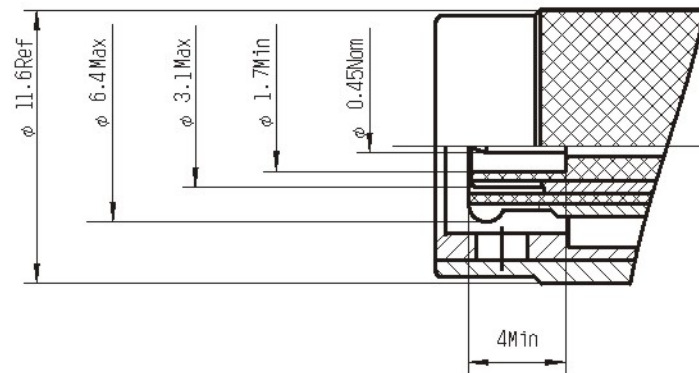



系列射频同轴连接器
SERIES TNC COAXIAL CONNECTORS

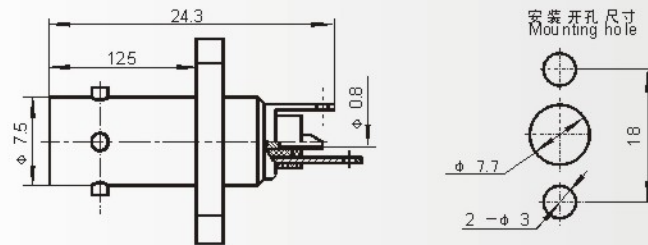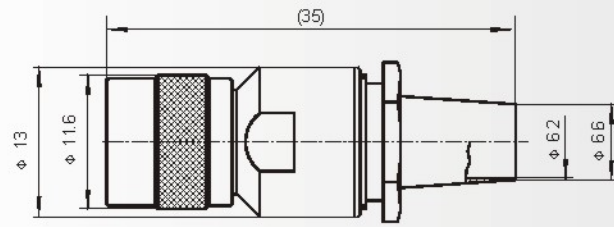

陕西华达科技有限公司
SHAANXI HUADA SCIENCE TECHNOLOGY CO., LTD

地址: 陕西省西安市电子城电子西街3号
Http: //www. huada853. com
E-mail: huada853@huada853. com