

SSMA


系列射频同轴连接器
SERIES SSMA RF COAXIAL CONNECTORS

SSMA射频同轴连接器具有体积小、机械电气性能优越、可靠性高等优点，是近年来通讯行业选用的射频连接器。


Series SSMA RF Coaxial connectors have the advantages of small,super mechanical and electrical performances,high rebility,etc. They products are widely used in the field of communication .

温度范围 Temperature range	-55 ~ +155℃	绝缘电阻 Insulation resistance	≥5000MΩ
特性阻抗 Characteristic Impedance	50Ω	介质耐压 Dielectric Withstanding voltage	750V
频率范围 Frequency range	0~40GHz	接触电阻 Contact resistance	中心导体 Center conductor ≤0.006Ω
			外导体 Outer conductor ≤0.002Ω
电压驻波比 VSWR	≤1.07+0.01f	寿命 Durability	500 Cycles


头部配合尺寸 INTERFACE MATING DIMENSIONS

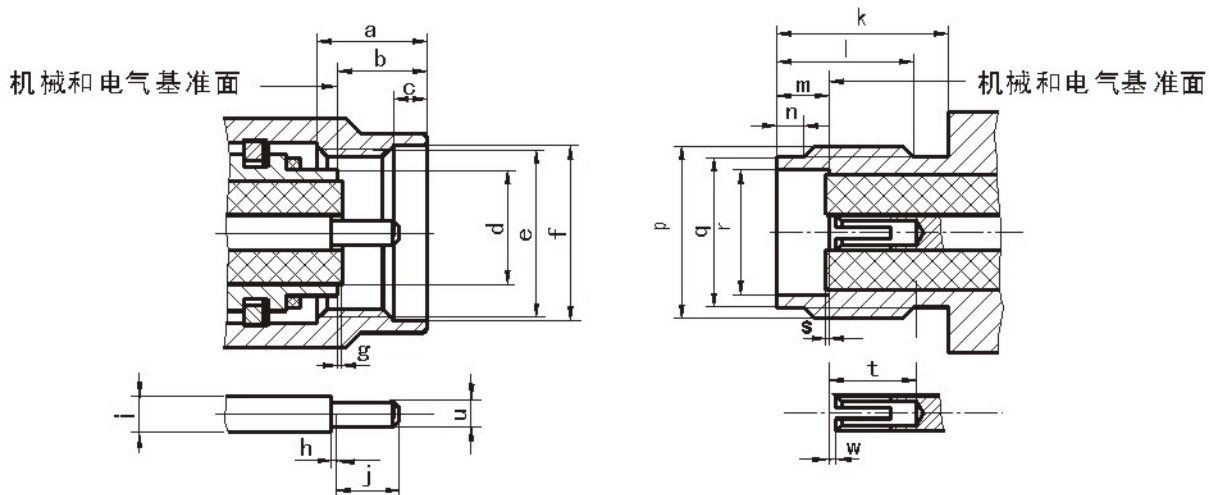


Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)	Symbol	MIN(mm)	MAX(mm)
a	2.54	3.43	h	0	0.25	p	10-36UNS-2A	
b	2.54	3.38	i	Φ0.85	Φ0.88	q	Φ3.89	Φ4.06
c	0.38	1.14	j	1.27	1.65	r	Φ3.23	Φ3.3
d	Φ3.15	Φ3.22	k	5.84	—	s	-0.13	0.05
e	10-36UNS-2B		l	4.83	5.33	t	2.92	—
f	Φ4.98	Φ5.13	m	1.91	1.96	u	Φ0.49	Φ0.52
g	-0.13	0.05	n	0.51	1.02	w	—	0.25

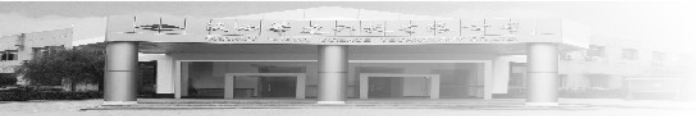


系列射频同轴连接器
SERIES SSMA COAXIAL CONNECTORS




SSMA-JB2




电缆剥线尺寸
Cable stripping dimension



SSMA-KFB2




安装开孔尺寸
Mounting hole




电缆剥线尺寸
Cable stripping dimension




Type	Cable type
SSMA-KFB2	SFT-50-1



SSMA-J2 等




电缆剥线尺寸
Cable stripping dimension




Type	d	D	Cable type
SSMA-J2	φ1	φ2	SYV-50-1, SFF-50-1
SSMA-J3	φ1.6	φ2.6	SYV-50-2 SFF-50-1.5-1



SSMA-JW3 等




电缆剥线尺寸
Cable stripping dimension




Type	d	D	Cable type
SSMA-JW2	φ1	φ2	SYV-50-1, SFF-50-1
SSMA-JW3	φ1.6	φ2.6	SYV-50-2 SFF-50-1.5-1



SSMA-KYD




安装开孔尺寸
Mounting hole







系列射频同轴连接器
SERIES SSMA COAXIAL CONNECTORS




SSMA-KFD1 等

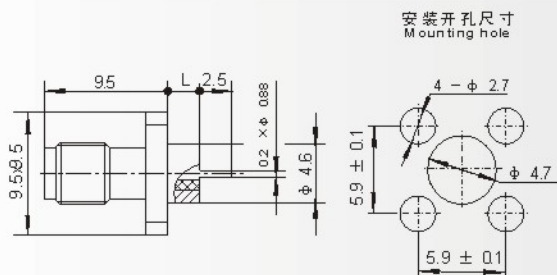



Type	L
SSMA-KFD1	2.4
SSMA-KFD2	3.2
SSMA-KFD3	4.8





SSMA-KFD

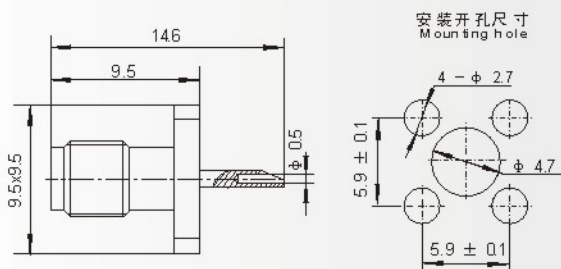

SSMA-KFD4

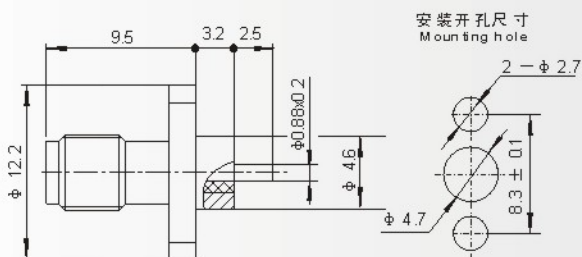

SSMA-KKK



SSMA-KK

